


IWA 30S + DryDock 12

SPECIFICATIONS

THE GALLEY®

IWA-30-S-DD-12-S-QW




Quartered White Oak / Exclusive Gray Resin+

IWA-30-S-DD-12-S-WA



American Black Walnut / Graphite Resin+

IWA-30-S-DD-12-S-GT



Graphite Wood Composite / Graphite Resin+

IWA-30-S-DD-12-S-GR



Exclusive Gray Resin+ / Resin+

IWA-30-S-DD-12-S-WH



Designer White Resin+ / Resin+

Wash Tools included (WKT-4T)




- | | | | |
|---|--|--|---|
| (1) Upper Tier
Drying Rack
9 1/4" x 18"
DR-09-U-xx | (1) Lower Tier
Wash Caddy
6" x 17"
WC-06-L-xx | (1) Lower Tier
Wash Bowl
12" x 17"
WB-12-L-xx | (1) Upper Tier
Utensil Caddy
6" x 18"
UC-06-U-xx |
|---|--|--|---|

Specifications


Single bowl
Users: 1
Wash Tools included: Four
DryDock Tool included: One
Galley BarTap® recommended: One
Outside dimensions: 39 1/2" x 19 1/2" x 2 1/16"
Interior dimensions: 38" x 17" x 2"
Countertop cutout: 38 1/2" x 18"
Minimum cabinet size: 42" or 107cm
Minimum clearance required for DryDock below countertop: 2 1/4"
DryDock location: Drain side (S)

Basin (KSO-30-S-DS-12-S-SS)

16GA 316L stainless steel indoor/outdoor
SilentArmor™ sound reduction technology
Angel finish
Three tier design
Star™ groove pattern
Reversible side drain
Drain cover included
Limited Lifetime Warranty
Made in the USA
ASME A112.19.3/CSA B45.4 certified
cUPC™ certified

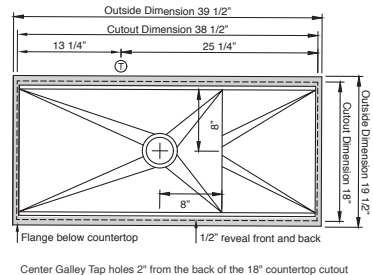

Center Galley Tap holes 2" from the back of the 18" countertop cutout

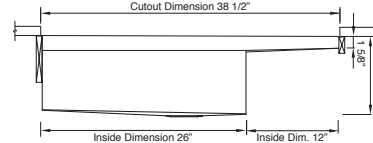

Important Installation Note: DryDock requires 2 1/4" minimum clearance below countertop

Customize Your Galley

- | | |
|------------------|-------------------------------|
| Add 7-12" length | 9" depth |
| Add 1-6" length | Center drain |
| Add 18" DryDock | Workstation* |
| Add 12" DryDock | WorkTop™ |
| Apron front | *Color coded labels available |


DryDock Tool included (DR-12)



- (1) Lower Tier
Drying Rack
12 1/4" x 17"
DR-12-L-xx

Upper Deck® & citrine.

Cover set UD-30-12-3P-QW/WA/GT/GR/WH White Oak, Walnut, Graphite, Gray or White Resin




citrine care

- | | | | |
|---|---|---|--|
| CIT-09-SS-C
Stainless Steel
Clean + Polish 9 oz | CIT-17-SS-S
Stainless Steel Spray
+ Refresh 17 oz | CIT-09-WD-C
Wood Condition
+ Protect 9 oz | CIT-04-WD-B
Wood Finishing
Balm 4 oz |
|---|---|---|--|

Recommended Basin Accessories & G4

Bottom Grate set BG-30-S-1-SS Stainless Steel



Strainer M-DRN-MSS
Angel Finish 304 Stainless Steel



Disposer Strainer G-DRN-MSS
Angel Finish 304 Stainless Steel



Auto Strainer A-DRN-PSS/MSS/BSS/YSS
Angel Finish 304 Stainless Steel with Polished, Matte, PVD Satin Black, or PVD Brushed Gold knob



A-DRN-MSS shown

Disposal G4-WD-125





IWA 30S + DryDock. 12

SPECIFICATIONS | Right Hand Drain Orientation

THE GALLEY.®

Tap Hole Specifications

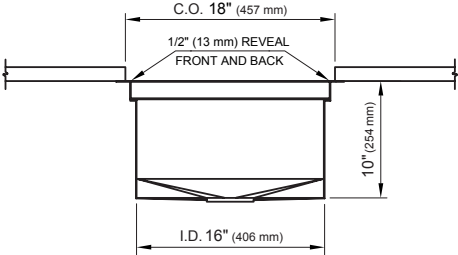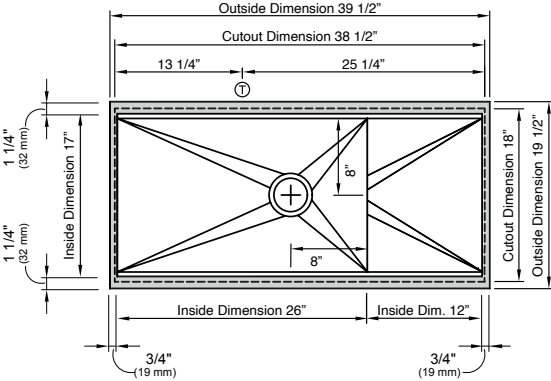

SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley BarTap® 1 3/8" min to 1 1/2" max hole diameter

Center Tap hole diameters 2" behind cutout



Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customer care@thegalley.com
for additional guidance on Tap and Tap Accessory placements

Countertop Cutout Plan

Important Installation Note: DryDock requires 2 1/4" minimum clearance below countertop

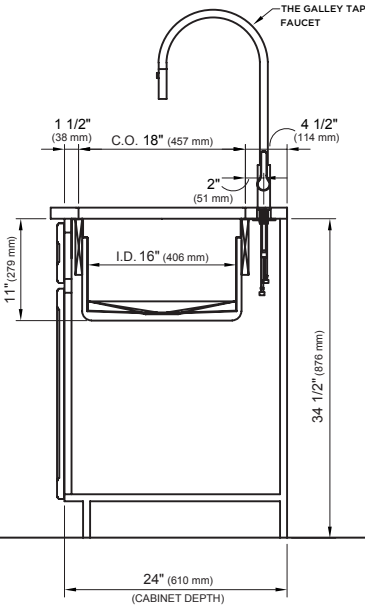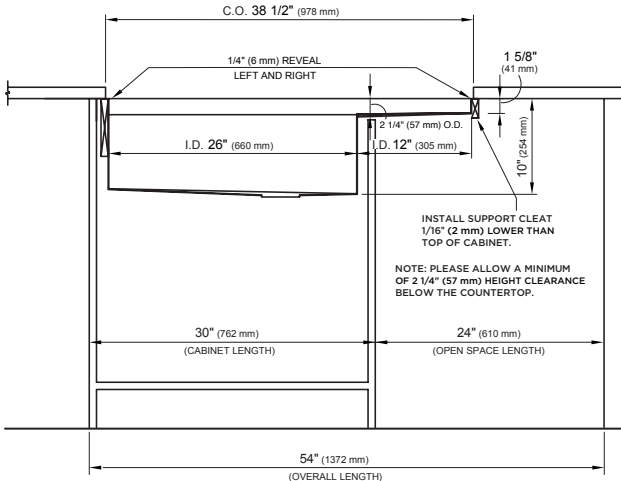

STAINLESS STEEL COMPLIANCE ASME A12.19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

TheGalley.com/specification-library


**Questions? For additional assistance, please contact
The Galley's Customer Care Department at 800.375.4255**

THE GALLEY®

Technical drawing of a rectangular cutout with a central circular hole and four triangular cutouts. The drawing includes dimensions for outside and inside dimensions, cutout dimensions, and hole dimensions.

Dimensions:

- Outside Dimension: 39 1/2"
- Cutout Dimension: 38 1/2"
- 25 1/4"
- 13 1/4"
- 1 1/4" (32 mm)
- Inside Dimension: 17"
- 1 1/4" (32 mm)
- Cutout Dimension: 18"
- Outside Dimension: 19 1/2"
- 8"
- 8"
- Inside Dim.: 12"
- Inside Dimension: 26"
- 3/4" (19 mm)
- 3/4" (19 mm)

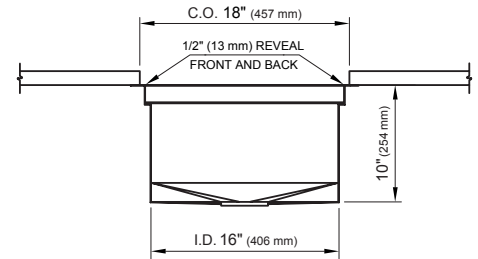


Call 800.375.4255 or email customercare@thegalley.com
for additional guidance on Tap and Tap Accessory placements

Technical drawing of a cabinet with dimensions in inches and millimeters.

Dimensions and Labels:

- C.O. 38 1/2"** (978 mm) - Overall width
- 1 5/8"** (41 mm) - Top edge thickness
- 10"** (254 mm) - Height from top edge to bottom edge
- 2 1/4"** (57 mm) O.D. - Outer diameter of the support cleat
- I.D. 12"** (305 mm) - Inner diameter of the support cleat
- 1/4"** (6 mm) REVEAL LEFT AND RIGHT - Gap between the cabinet and the wall
- I.D. 26"** (660 mm) - Inner diameter of the cabinet opening
- INSTALL SUPPORT CLEAT 1/16" (2 mm) LOWER THAN TOP OF CABINET.**
- NOTE: PLEASE ALLOW A MINIMUM OF 2 1/4" (57 mm) HEIGHT CLEARANCE BELOW THE COUNTERTOP.**
- 24"** (610 mm) (OPEN SPACE LENGTH) - Length of the open space below the cabinet
- 30"** (762 mm) (CABINET LENGTH) - Length of the cabinet
- 54"** (1372 mm) (OVERALL LENGTH) - Total length including the open space and cabinet

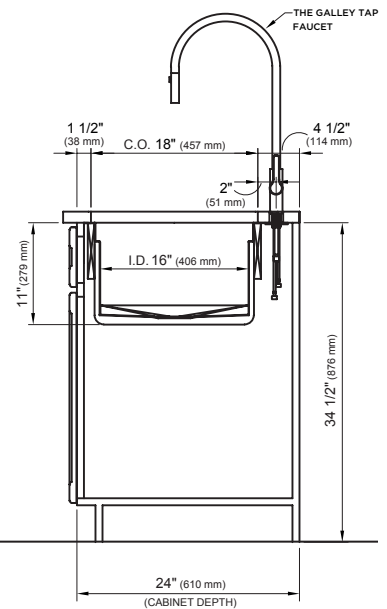

*Questions? For additional assistance, please contact
The Galley's Customer Care Department at 800.375.4255*