# Ideal WashStation™ 30S

## IWA-30-S-QW



## IWA-30-S-WA



# IWA-30-S-GT



Graphite Wood Composite / Graphite Resin+

#### IWA-30-S-GR



Exclusive Grav Resin\* / Resin+

# IWA-30-S-WH



Designer White Resin\* / Resin+

# Wash Tools included (WKT-4T)











# WC-06-L-xx







# Upper Deck, & citrine,

Cover set UD-30-2P-QW/WA/GT/GR/WH White Oak, Walnut, Graphite, Gray or White Resin



## citrine care

#### CIT-09-SS-C





Stainless Steel Spray + Refresh 17 oz



CIT-04-WD-B

# Wood Finishing

# **Specifications**

Single bowl

Users: 1

Wash Tools included: Four

Galley BarTap<sub>®</sub> recommended: One Outside dimensions: 27 1/2" x 19 1/2" x 10 5/16"

Interior dimensions: 26" x 17" x 10" Countertop cutout: 26 1/2" x 18"

Basin area: 26" x 16"

Minimum cabinet size: 30" or 76cm

### Basin (KSO-30-S-SS)

THE GALLEY.

16GA 316L stainless steel indoor/outdoor SilentArmor™ sound reduction technology

Angel finish Three tier design

Star™ groove pattern


Reversible side drain

Drain cover included


Limited Lifetime Warranty

Made in the USA ASME A112.19.3/CSA B45.4 certified

cUPC™ certified



Center Galley Tap holes 2" from the back of the 18" countertop cutout



# Customize Your Galley

### Recommended Basin Accessories & G4

Bottom Grate set BG-30-S-1-SS Stainless Steel



Strainer M-DRN-MSS







Auto Strainer A-DRN-PSS/MSS/BSS/YSS Angel Finish 304 Stainless Stor PVD Brushed Gold knob




















Disposal G4-WD-125

# Ideal WashStation™ 30S



# Tap Hole Specifications




C.O. 18" (457 mm) 1/2" (13 mm ) REVEAL FRONT AND BACK 10"(254 r I.D. 16" (406 mm)

#### SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley BarTap- 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements

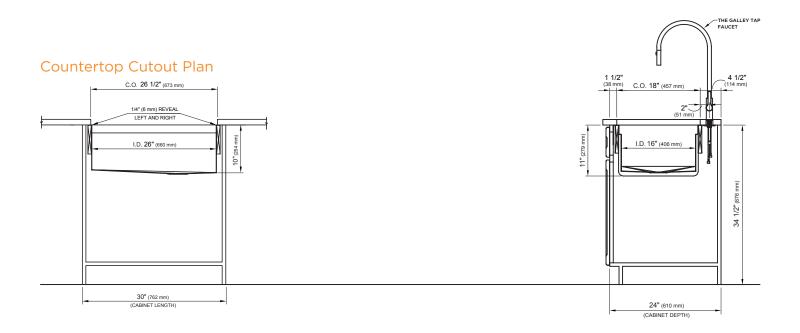

# STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.


DWG and DXF templates available on our website:

The Galley.com/specification-library

# Ideal WashStation™ 30S



# Tap Hole Specifications



1/2" (13 mm ) REVEAL FRONT AND BACK 10"(254 I.D. 16" (406 mm)

C.O. 18" (457 mm)


#### SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements

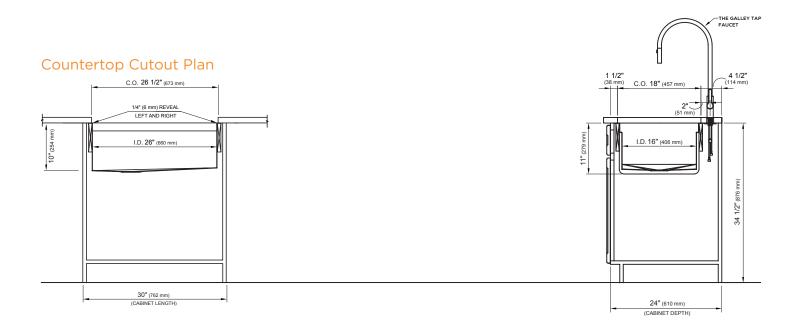

# STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

The Galley.com/specification-library

Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255