Ideal WashStation™ 3S

THE GALLEY.

IWA-3-S-QW



Quartered White Oak / Exclusive Gray Resin

IWA-3-S-WA



American Black Walnut / Graphite Resin+

IWA-3-S-GT



IWA-3-S-GR



Exclusive Grav Resin* / Resin-

IWA-3-S-WH



Designer White Resin* / Resin+

Wash Tools included (WKT-4T)



Drying Rack 9 1/4" x 18"

DR-09-U-xx









WB-12-L-xx



Wash Bowl 12" x 17" UC-06-U-xx

Upper Deck. & citrine.

Cover set UD-3-2P-QW/WA/GT/GR/WH White Oak, Walnut, Graphite, Gray or White Resin



citrine care

CIT-09-SS-C



CIT-17-SS-S

Stainless Steel Spray + Refresh 17 oz



CIT-04-WD-B Wood Finishing Balm 4 oz

Specifications

Single bowl

Users: 1

Wash Tools included: Four

Galley Tap recommended: One

Outside dimensions: 33 1/2" x 19 1/2" x 10 5/16" Interior dimensions: 32" x 17" x 10"

Countertop cutout: 32 1/2" x 18"

Basin area: 32" x 16"

Minimum cabinet size: 36" or 90cm

Basin (KSO-3-S-SS)

16GA 316L stainless steel indoor/outdoor SilentArmor™ sound reduction technology Angel finish

Three tier design

Star™ groove pattern


Reversible side drain Drain cover included

Limited Lifetime Warranty


Made in the USA

ASME A112.19.3/CSA B45.4 certified

cUPC™ certified



Center Galley Tap holes 2" from the back of the 18" countertop cutout



Customize Your Galley

Recommended Basin Accessories & G4

Bottom Grate set BG-3-S-1-SS Stainless Steel



Strainer M-DRN-MSS

Disposer Strainer G-DRN-MSS Angel Finish 304 Stainless Stee
















Disposal G4-WD-125

Auto Strainer A-DRN-PSS/MSS/BSS/YSS Angel Finish 304 Stainless Ste or PVD Brushed Gold knob

Ideal WashStation™ 3S



Tap Hole Specifications



C.O. 18" (457 mm) 1/2" (13 mm) REVEAL FRONT AND BACK 10"(254 r I.D. 16" (406 mm)


SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements

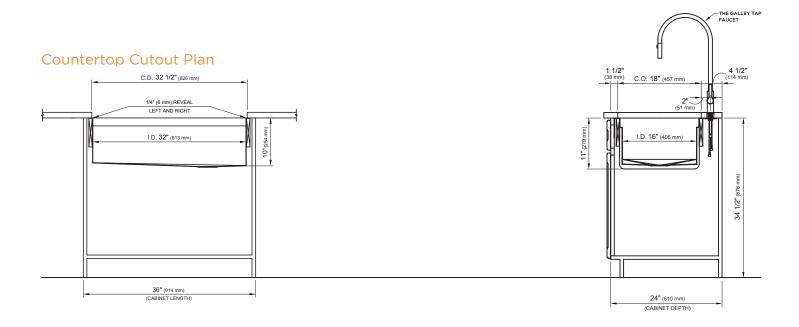

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:


The Galley.com/specification-library

Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255

Ideal WashStation™ 3S



Tap Hole Specifications




SUGGESTED GALLEY TAP PLACEMENT GUIDE


Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements



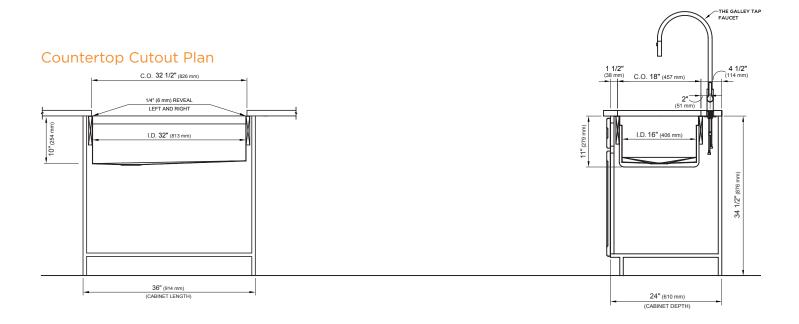

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

The Galley.com/specification-library

Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255