


# IWA 4S + DryDock 12

## SPECIFICATIONS

THE GALLEY®

### IWA-4-S-DD-12-S-QW

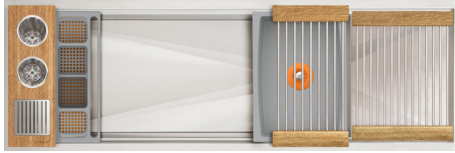

Quartered White Oak / Exclusive Gray Resin+

### IWA-4-S-DD-12-S-WA



American Black Walnut / Graphite Resin+

### IWA-4-S-DD-12-S-GT



Graphite Wood Composite / Graphite Resin+

### IWA-4-S-DD-12-S-GR



Exclusive Gray Resin+ / Resin+

### IWA-4-S-DD-12-S-WH



Designer White Resin+ / Resin+


### Wash Tools included (WKT-4T)



- |                                                             |                                                        |                                                        |                                                           |
|-------------------------------------------------------------|--------------------------------------------------------|--------------------------------------------------------|-----------------------------------------------------------|
| (1) Upper Tier<br>Drying Rack<br>9 1/4" x 18"<br>DR-09-U-xx | (1) Lower Tier<br>Wash Caddy<br>6" x 17"<br>WC-06-L-xx | (1) Lower Tier<br>Wash Bowl<br>12" x 17"<br>WB-12-L-xx | (1) Upper Tier<br>Utensil Caddy<br>6" x 18"<br>UC-06-U-xx |
|-------------------------------------------------------------|--------------------------------------------------------|--------------------------------------------------------|-----------------------------------------------------------|

### Upper Deck® & citrine.

Cover set UD-4-12-3P-QW/WA/GT/GR/WH White Oak, Walnut, Graphite, Gray or White Resin



24" 24" 12"

### citrine care





- |                                                       |                                                         |                                                 |                                            |
|-------------------------------------------------------|---------------------------------------------------------|-------------------------------------------------|--------------------------------------------|
| CIT-09-SS-C<br>Stainless Steel<br>Clean + Polish 9 oz | CIT-17-SS-S<br>Stainless Steel Spray<br>+ Refresh 17 oz | CIT-09-WD-C<br>Wood Condition<br>+ Protect 9 oz | CIT-04-WD-B<br>Wood Finishing<br>Balm 4 oz |
|-------------------------------------------------------|---------------------------------------------------------|-------------------------------------------------|--------------------------------------------|

### Specifications

Single bowl  
Users: 1  
Wash Tools included: Four  
DryDock Tool included: One  
Galley Tap recommended: One  
Outside dimensions: 57 1/2" x 19 1/2" x 2 1/16"  
Interior dimensions: 56" x 17" x 2"  
Countertop cutout: 56 1/2" x 18"  
Minimum cabinet size: 60" or 150cm  
**Minimum clearance required for DryDock below countertop: 2 1/4"**  
DryDock location: Drain side (S)

### Basin (KSO-4-S-DS-12-S-SS)

16GA 316L stainless steel indoor/outdoor  
SilentArmor™ sound reduction technology  
Angel finish  
Three tier design  
Star™ groove pattern  
Reversible side drain  
Drain cover included  
Limited Lifetime Warranty  
Made in the USA  
ASME A112.19.3/CSA B45.4 certified  
cUPC™ certified

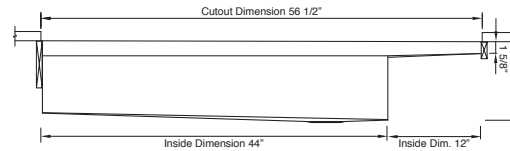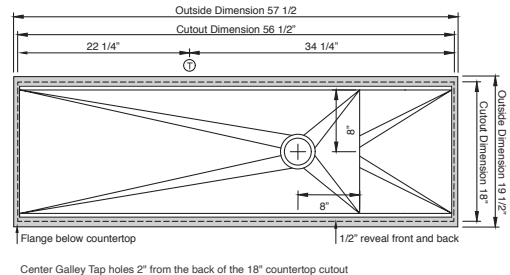

**Important Installation Note:** DryDock requires 2 1/4" minimum clearance below countertop

### Customize Your Galley

- |                                                                                          |                                                                       |
|------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| Add 7-12" length<br>Add 1-6" length<br>Add 18" DryDock<br>Add 12" DryDock<br>Apron front | 9" depth<br>Center drain<br>WorkTop™<br>*Color coded labels available |
|------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|


### DryDock Tool included (DR-12)



- (1) Lower Tier  
Drying Rack  
12 1/4" x 17"  
DR-12-L-xx

### Recommended Basin Accessories & G4

Bottom Grate set BG-4-S-2-SS Stainless Steel



11 1/2" 31 1/2"

Strainer M-DRN-MSS  
Angel Finish 304 Stainless Steel



Disposer Strainer G-DRN-MSS  
Angel Finish 304 Stainless Steel



Auto Strainer A-DRN-PSS/MSS/BSS/YSS  
Angel Finish 304 Stainless Steel with Polished, Matte, PVD Satin Black, or PVD Brushed Gold knob



A-DRN-MSS shown

Disposal G4-WD-125





# IWA 4S + DryDock<sup>®</sup> 12

## SPECIFICATIONS | Right Hand Drain Orientation



### Tap Hole Specifications

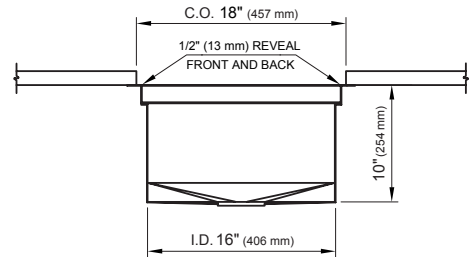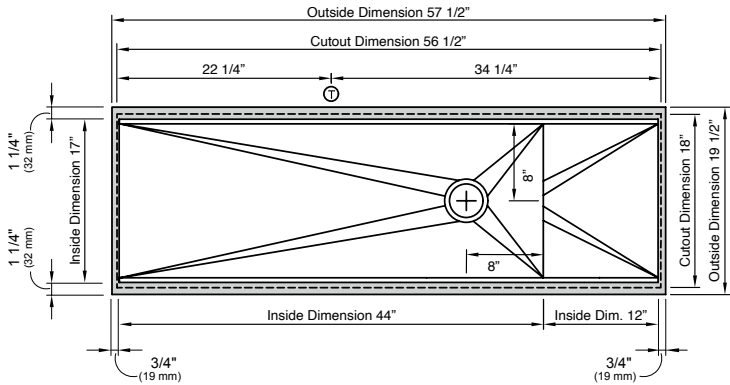

#### SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter

Center Tap hole diameters 2" behind cutout



Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email [customercare@thegalley.com](mailto:customercare@thegalley.com)  
for additional guidance on Tap and Tap Accessory placements

### Countertop Cutout Plan

**Important Installation Note:** DryDock requires 2 1/4" minimum clearance below countertop

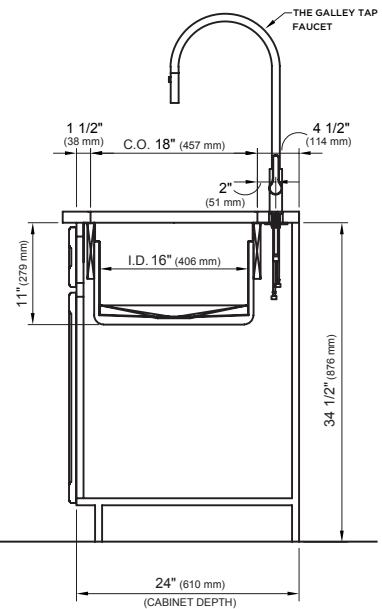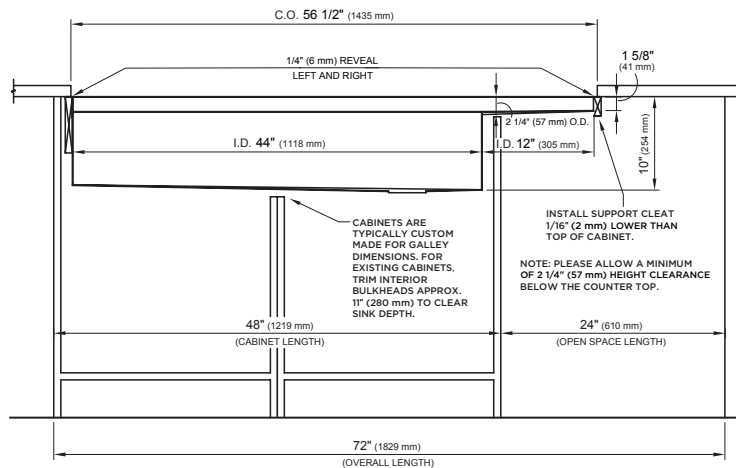

#### STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

[TheGalley.com/specification-library](http://TheGalley.com/specification-library)



Questions? For additional assistance, please contact  
The Galley's Customer Care Department at 800.375.4255

# IWA 4S + DryDock® 12

## SPECIFICATIONS | Left Hand Drain Orientation

# THE GALLEY.

## Tap Hole Specifications

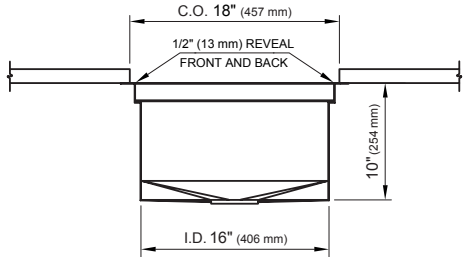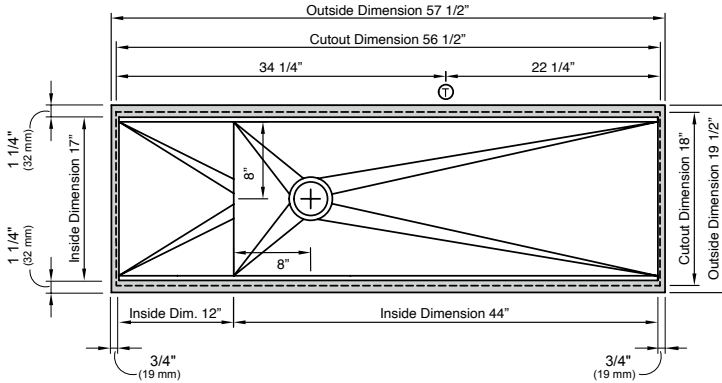

## SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter

Center Tap hole diameters 2" behind cutout



**Note:** Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

**Note:** Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email [customer@thegalley.com](mailto:customer@thegalley.com) for additional guidance on Tap and Tap Accessory placements

## Countertop Cutout Plan

**Important Installation Note:** DryDock requires 2 1/4" minimum clearance below countertop

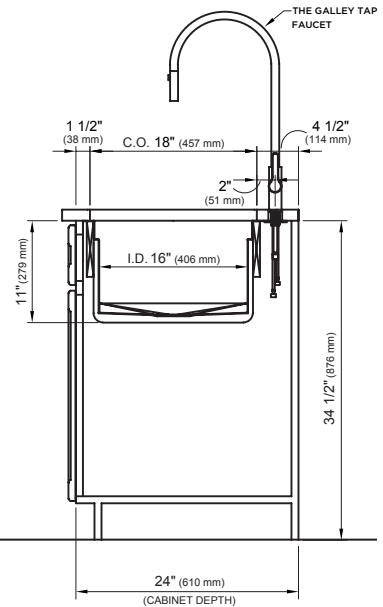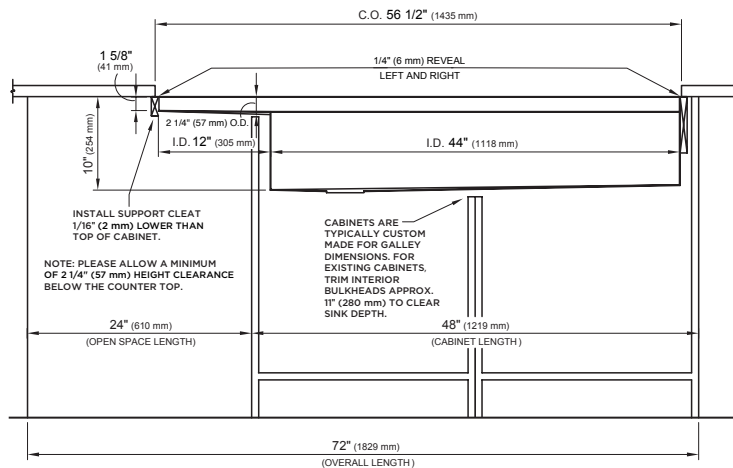

STAINLESS STEEL COMPLIANCE ASME A112.19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

[TheGalley.com/specification-library](http://TheGalley.com/specification-library)

**Questions? For additional assistance, please contact  
The Galley's Customer Care Department at 800.375.4255**