


IWA 4S + DryDock. 18

SPECIFICATIONS

THE GALLEY®

IWA-4-S-DD-18-S-QW

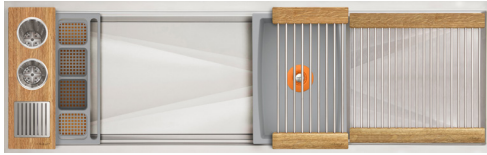

Quartered White Oak / Exclusive Gray Resin+

IWA-4-S-DD-18-S-WA



American Black Walnut / Graphite Resin+

IWA-4-S-DD-18-S-GT



Graphite Wood Composite / Graphite Resin+

IWA-4-S-DD-18-S-GR



Exclusive Gray Resin+ / Resin+

IWA-4-S-DD-18-S-WH



Designer White Resin+ / Resin+


Wash Tools included (WKT-4T)



- | | | | |
|---|--|--|---|
| (1) Upper Tier
Drying Rack
9 1/4" x 18"
DR-09-U-xx | (1) Lower Tier
Wash Caddy
6" x 17"
WC-06-L-xx | (1) Lower Tier
Wash Bowl
12" x 17"
WB-12-L-xx | (1) Upper Tier
Utensil Caddy
6" x 18"
UC-06-U-xx |
|---|--|--|---|

Upper Deck® & citrine.

Cover set UD-4-18-3P-QW/WA/GT/GR/WH White Oak, Walnut, Graphite, Gray or White Resin



24" 24" 18"

citrine care




Specifications

Single bowl
Users: 1
Wash Tools included: Four
DryDock Tool included: One
Galley Tap recommended: One
Outside dimensions: 63 1/2" x 19 1/2" x 2 1/16"
Interior dimensions: 62" x 17" x 2"
Countertop cutout: 62 1/2" x 18"
Minimum cabinet size: 66" or 165cm
Minimum clearance required for DryDock below countertop: 2 1/4"
DryDock location: Drain side (S)

Basin (KSO-4-S-DS-18-S-SS)

16GA 316L stainless steel indoor/outdoor
SilentArmor™ sound reduction technology
Angel finish
Three tier design
Star™ groove pattern
Reversible side drain
Drain cover included
Limited Lifetime Warranty
Made in the USA
ASME A112.19.3/CSA B45.4 certified
cUPC™ certified

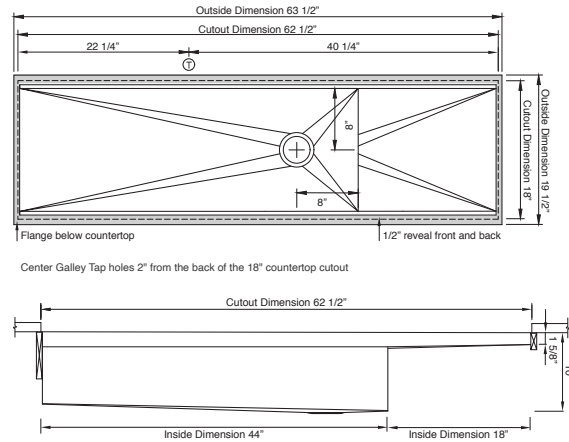

Center Galley Tap holes 2" from the back of the 18" countertop cutout

Important Installation Note: DryDock requires 2 1/4" minimum clearance below countertop

Customize Your Galley

- | | |
|------------------|-------------------------------|
| Add 7-12" length | 9" depth |
| Add 1-6" length | Center drain |
| Add 18" DryDock | WorkTop™ |
| Add 12" DryDock | *Color coded labels available |
| Apron front | |


DryDock Tool included (DR-18)



- (1) Dual Tier
Drying Rack
18" x 17"
DR-18-D-xx

Recommended Basin Accessories & G4

Bottom Grate set BG-4-S-2-SS Stainless Steel



11 1/2" 31 1/2"

Strainer M-DRN-MSS
Angel Finish 304 Stainless Steel



Disposer Strainer G-DRN-MSS
Angel Finish 304 Stainless Steel



Auto Strainer A-DRN-PSS/MSS/BSS/YSS
Angel Finish 304 Stainless Steel with Polished, Matte, PVD Satin Black, or PVD Brushed Gold knob



A-DRN-MSS shown

Disposal G4-WD-125





IWA 4S + DryDock® 18

SPECIFICATIONS | Right Hand Drain Orientation



Tap Hole Specifications

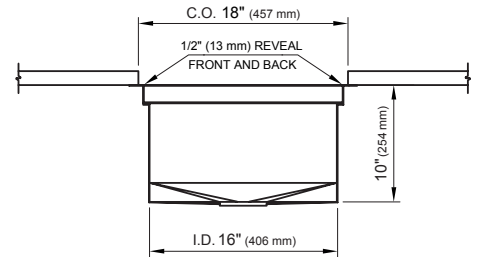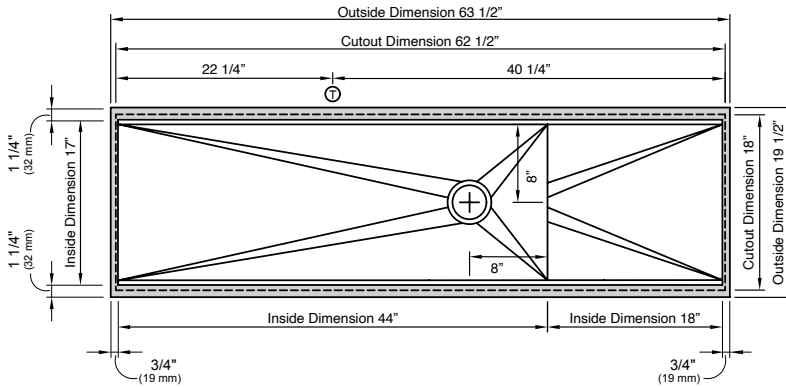

SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter

Center Tap hole diameters 2" behind cutout



Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements

Countertop Cutout Plan

Important Installation Note: DryDock requires 2 1/4" minimum clearance below countertop

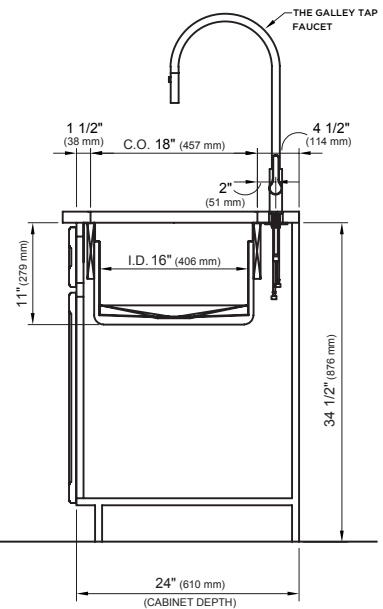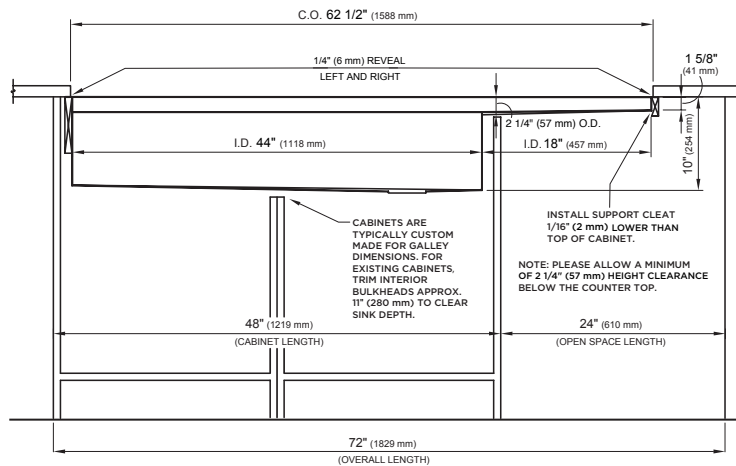

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

TheGalley.com/specification-library



Questions? For additional assistance, please contact
The Galley's Customer Care Department at 800.375.4255

IWA 4S + DryDock® 18

SPECIFICATIONS | Left Hand Drain Orientation

THE GALLEY®

Tap Hole Specifications

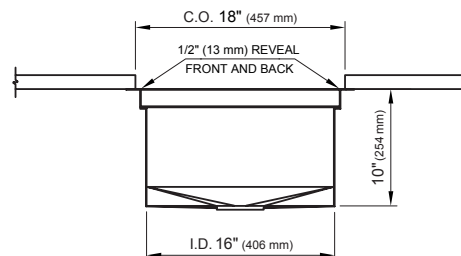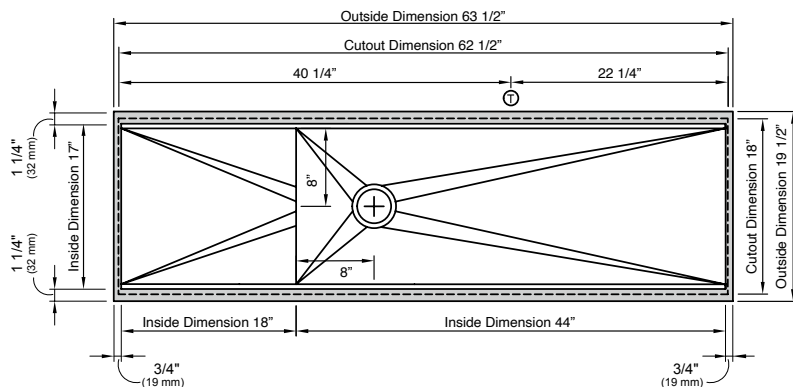

SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter

Center Tap hole diameters 2" behind cutout



Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com
for additional guidance on Tap and Tap Accessory placements

Countertop Cutout Plan

Important Installation Note: DryDock requires 2 1/4" minimum clearance below countertop

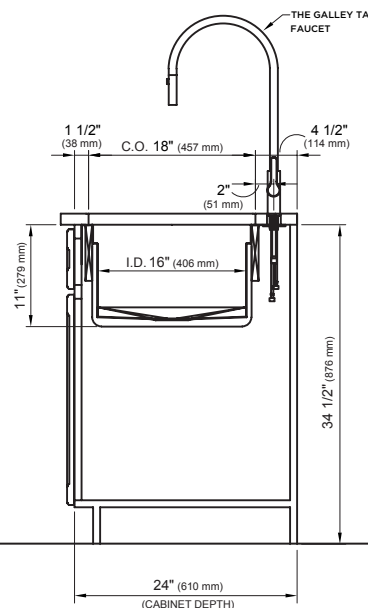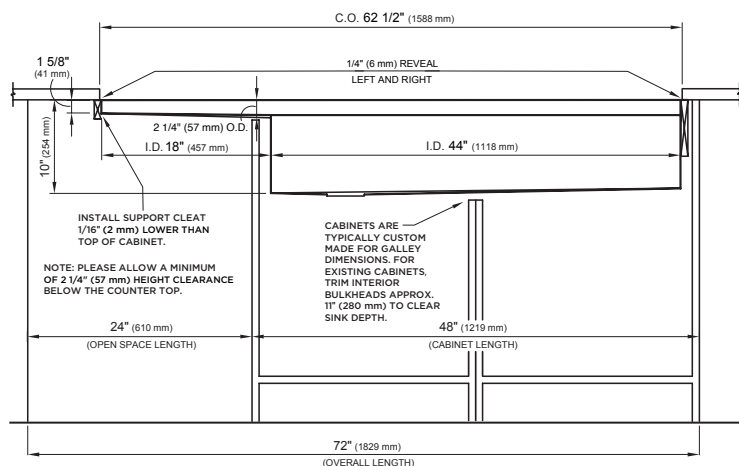

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

TheGalley.com/specification-library

Questions? For additional assistance, please contact
The Galley's Customer Care Department at 800.375.4255