


IWA² 3S + DryDock[®] 12

SPECIFICATIONS

THE GALLEY[®]

IWA-3-S-DD-12-S-2-QW

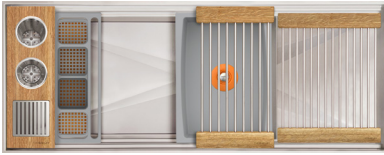

Quartered White Oak / Exclusive Gray Resin+

IWA-3-S-DD-12-S-2-WA



American Black Walnut / Graphite Resin+

IWA-3-S-DD-12-S-2-GT



Graphite Wood Composite / Graphite Resin+

IWA-3-S-DD-12-S-2-GR



Exclusive Gray Resin+ / Resin+

IWA-3-S-DD-12-S-2-WH



Designer White Resin+ / Resin+

Wash Tools included (WKT-4T)



(1) Upper Tier
Drying Rack
9 1/4" x 18"
DR-09-U-xx



(1) Lower Tier
Wash Caddy
6" x 17"
WC-06-L-xx




(1) Lower Tier
Wash Bowl
12" x 17"
WB-12-L-xx



(1) Upper Tier
Utensil Caddy
6" x 18"
UC-06-U-xx

Upper Deck[®] & citrine.

Cover set UD-3-12-3P-QW/WA/GT/GR/WH White Oak, Walnut, Graphite, Gray or White Resin



citrine care

CIT-09-SS-C



Stainless Steel
Clean + Polish 9 oz

CIT-17-SS-S



Stainless Steel Spray
+ Refresh 17 oz

CIT-09-WD-C



Wood Condition
+ Protect 9 oz

CIT-04-WD-B



Wood Finishing
Balm 4 oz

Specifications

Single bowl

Users: 1

Wash Tools included: Four

DryDock Tool included: One

Galley Tap recommended: One

Outside dimensions: 45 1/2" x 19 1/2" x 2 7/8"

Interior dimensions: 44" x 18" x 2 3/4"

Countertop cutout: 44" x 18"

Minimum cabinet size: 48" or 120cm

Minimum clearance required for DryDock below countertop: 3"

DryDock location: Drain side (S)

Basin (KSO-3-S-DS-12-S-2-SS)

16GA 316L stainless steel indoor/outdoor

SilentArmor™ sound reduction technology

Angel finish

Three tier design with integrated Upper Tier

Star™ groove pattern

Reversible side drain


Drain cover included

Limited Lifetime Warranty


Made in the USA

ASME A112.19.3/CSA B45.4 certified

cUPC™ certified

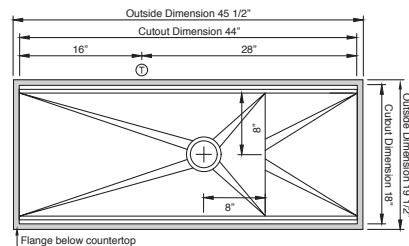

Center Galley Tap holes 2" from the back of the 18" countertop cutout

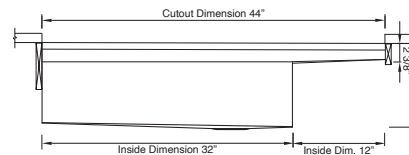

Important Installation Note: DryDock requires 3" minimum clearance below countertop

Customize Your Galley

Add 7-12" length
Add 1-6" length
Add 18" DryDock
Add 12" DryDock
Apron front

9" depth
Center drain
WorkTop™
*Color coded labels available

DryDock Tool included (DR-12)



(1) Lower Tier
Drying Rack
12 1/4" x 17"
DR-12-L-xx

Recommended Basin Accessories & G4

Bottom Grate set BG-3-S-1-SS Stainless Steel



31 1/2"

Strainer M-DRN-MSS

Angel Finish 304 Stainless Steel



Disposer Strainer G-DRN-MSS

Angel Finish 304 Stainless Steel



Auto Strainer A-DRN-PSS/MSS/BSS/YSS

Angel Finish 304 Stainless Steel with Polished, Matte, PVD Satin Black, or PVD Brushed Gold knob



A-DRN-MSS shown

Disposal G4-WD-125





IWA² 3S + DryDock 12

SPECIFICATIONS | Right Hand Drain Orientation

THE GALLEY®

Tap Hole Specifications

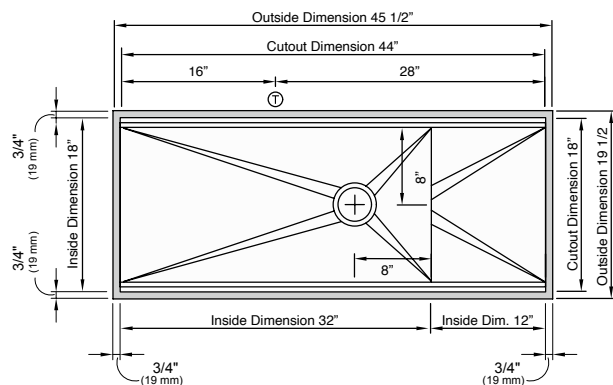

SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter

Center Tap hole diameters 2" behind cutout



Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customer@thegalley.com
for additional guidance on Tap and Tap Accessory placements

Countertop Cutout Plan

Important Installation Note: DryDock requires 3" minimum clearance below countertop

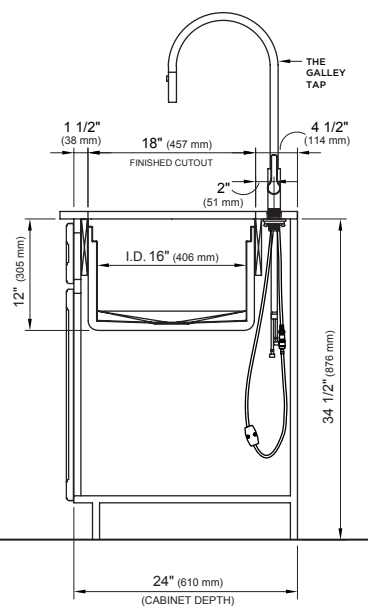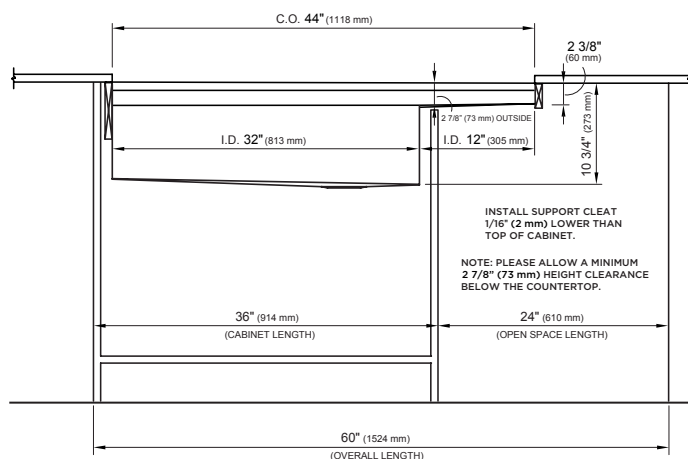

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08


WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

TheGalley.com/specification-library

Questions? For additional assistance, please contact
The Galley's Customer Care Department at 800.375.4255


THE GALLEY®

[illegible]

Note: Tap Placements are for right hand or left hand drain orientation

Diagram illustrating the dimensions and installation requirements for a cabinet:

- Top Dimensions:**
 - C.O. 44" (1118 mm)
 - 2 3/8" (60 mm)
 - 2 7/8" (73 mm) OUTSIDE
 - I.D. 12" (305 mm)
 - I.D. 32" (813 mm)
- Vertical Dimensions:**
 - 10 3/4" (273 mm)
- Horizontal Dimensions:**
 - 24" (610 mm) (OPEN SPACE LENGTH)
 - 36" (914 mm) (CABINET LENGTH)
 - 60" (1524 mm) (OVERALL LENGTH)
- Installation Instructions:**
 - INSTALL SUPPORT CLEAT 1/16" (2 mm) LOWER THAN TOP OF CABINET.
 - NOTE: PLEASE ALLOW A MINIMUM 2 7/8" (73 mm) HEIGHT CLEARANCE BELOW THE COUNTERTOP.

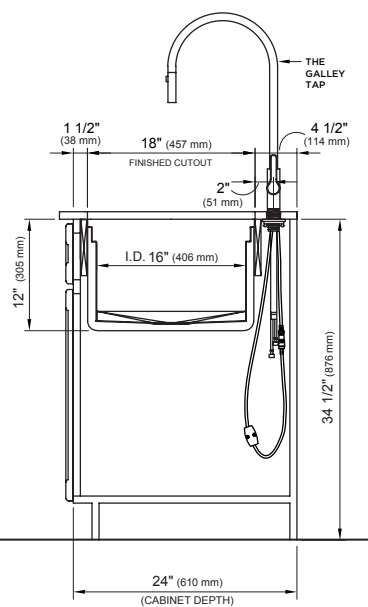

*Questions? For additional assistance, please contact
The Galley's Customer Care Department at 800.375.4255*