# Ideal WashStation<sup>2</sup> 3S

# SPECIFICATIONS

### IWA-3-S-2-QW



Quartered White Oak / Exclusive Gray Resin+

### IWA-3-S-2-WA



American Black Walnut / Graphite Resin+

#### IWA-3-S-2-GT



Graphite Wood Composite / Graphite Resin+

#### IWA-3-S-2-GR



Exclusive Gray Resin\* / Resin+

# IWA-3-S-2-WH



Designer White Resin\* / Resin+

# Wash Tools included (WKT-4T)



DR-09-U-xx





WC-06-L-xx



WB-12-L-xx



ier

(1) Upper Tier Utensil Caddy 6" x 18" UC-06-U-xx

# Upper Deck. & citrine.

Cover set UD-3-2P-QW/WA/GT/GR/WH White Oak, Walnut, Graphite, Gray or White Resin





### citrine care

#### CIT-09-SS-C









CIT-04-WD-B

Wood Finishing
Ralm 4 oz

# THE GALLEY.

# **Specifications**

Single bowl Users: 1

Wash Tools included: Four

Galley Tap recommended: One

Outside dimensions: 33 1/2" x 19 1/2" x 11 1/16" Interior dimensions: 32" x 18" x 10 3/4"

Countertop cutout: 32" x 18"

Basin area: 32" x 16"

Minimum cabinet size: 36" or 90cm

#### Basin (KSO-3-S-2-SS)

16GA 316L stainless steel indoor/outdoor SilentArmor™ sound reduction technology Angel finish

Three tier design with integrated Upper Tier Star™ groove pattern


Reversible side drain Drain cover included

Limited Lifetime Warranty

Made in the USA

ASME A112.19.3/CSA B45.4 certified

cUPC™ certified



Center Galley Tap holes 2" from the back of the 18" countertop cutout



# Customize Your Galley

Add 7-12" length Add 1-6" length Add 18" DryDock Add 12" DryDock

9" depth Center drain WorkTop™



Bottom Grate set BG-3-S-1-SS Stainless Steel



Strainer M-DRN-MSS

Angel Finish 304 Stainless St





Auto Strainer A-DRN-PSS/MSS/BSS/YSS Angel Finish 304 Stainless Steel with Polished, Matte, PVD Satin Black or PVD Brushed Gold knob















Disposal G4-WD-125

# Ideal WashStation<sup>2</sup> 3S



# Tap Hole Specifications






#### SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email **customercare@thegalley.com** for additional guidance on Tap and Tap Accessory placements

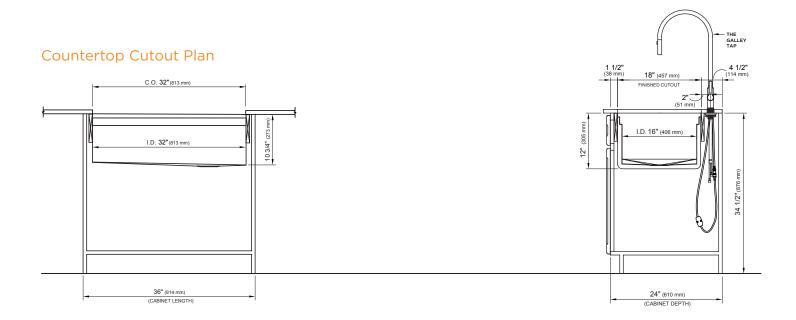

## STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.


DWG and DXF templates available on our website:


TheGalley.com/specification-library

# Ideal WashStation<sup>2</sup> 3S



# Tap Hole Specifications






#### SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email **customercare@thegalley.com** for additional guidance on Tap and Tap Accessory placements

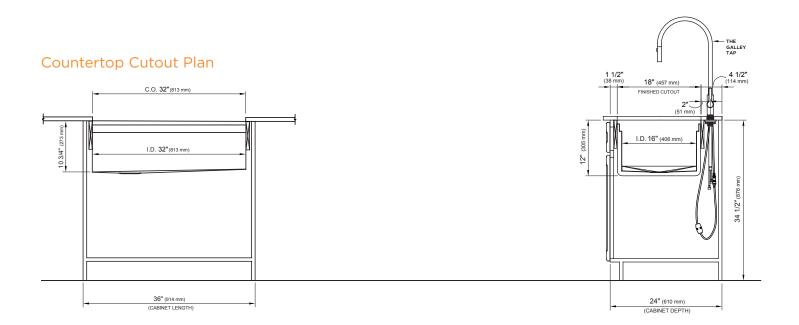

## STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

TheGalley.com/specification-library

Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255