


IWA² 4S + DryDock. 18

SPECIFICATIONS

THE GALLEY®

IWA-4-S-DD-18-S-2-QW

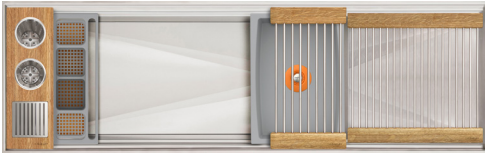

Quartered White Oak / Exclusive Gray Resin+

IWA-4-S-DD-18-S-2-WA



American Black Walnut / Graphite Resin+

IWA-4-S-DD-18-S-2-GT



Graphite Wood Composite / Graphite Resin+

IWA-4-S-DD-18-S-2-GR



Exclusive Gray Resin+ / Resin+

IWA-4-S-DD-18-S-2-WH



Designer White Resin+ / Resin+

Wash Tools included (WKT-4T)



(1) Upper Tier
Drying Rack
9 1/4" x 18"
DR-09-U-xx

(1) Lower Tier
Wash Caddy
6" x 17"
WC-06-L-xx

(1) Lower Tier
Wash Bowl
12" x 17"
WB-12-L-xx


(1) Upper Tier
Utensil Caddy
6" x 18"
UC-06-U-xx

Specifications

Single bowl
Users: 1
Wash Tools included: Four
DryDock Tool included: One
Galley Tap recommended: One
Outside dimensions: 63 1/2" x 19 1/2" x 2 7/8"
Interior dimensions: 62" x 18" x 2 3/4"
Countertop cutout: 62" x 18"
Minimum cabinet size: 66" or 165cm
Minimum clearance required for DryDock below countertop: 3"
DryDock location: Drain side (S)

Basin (KSO-4-S-DS-18-S-2-SS)

16GA 316L stainless steel indoor/outdoor
SilentArmor™ sound reduction technology
Angel finish
Three tier design with integrated Upper Tier
Star™ groove pattern
Reversible side drain
Drain cover included
Limited Lifetime Warranty
Made in the USA
ASME A112.19.3/CSA B45.4 certified
cUPC™ certified

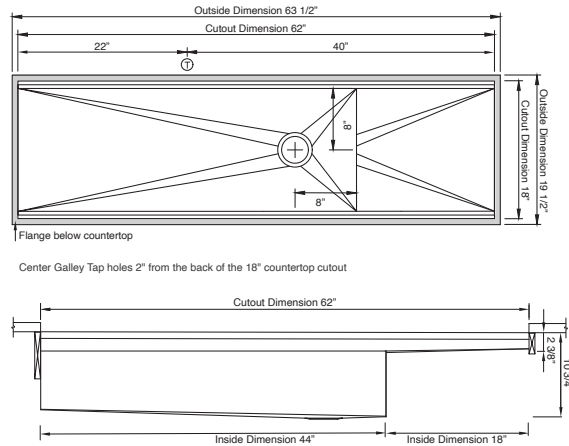

Important Installation Note: DryDock requires 3" minimum clearance below countertop

Customize Your Galley

Add 7-12" length
Add 1-6" length
Add 18" DryDock
Add 12" DryDock
Apron front
9" depth
Center drain
WorkTop™
*Color coded labels available


DryDock Tool included (DR-18)



(1) Dual Tier
Drying Rack
18" x 17"
DR-18-D-xx



Upper Deck. & citrine.

Cover set UD-4-18-3P-QW/WA/GT/GR/WH White Oak, Walnut, Graphite, Gray or White Resin




24"
24"
18"
18"

citrine care



Recommended Basin Accessories & G4

Bottom Grate set BG-4-S-2-SS Stainless Steel



Strainer M-DRN-MSS
Angel Finish 304 Stainless Steel



Disposer Strainer G-DRN-MSS
Angel Finish 304 Stainless Steel



Auto Strainer A-DRN-PSS/MSS/BSS/YSS
Angel Finish 304 Stainless Steel with Polished, Matte, PVD Satin Black, or PVD Brushed Gold knob




A-DRN-MSS shown

Disposal G4-WD-125



THE GALLEY®

Technical drawing of a rectangular sign with a cross design. The drawing shows the overall dimensions and internal structure. The outer frame is 63 1/2 inches wide and 19 1/2 inches high. The inner frame is 62 inches wide and 18 inches high. The cross design is centered, with a circular center containing a cross. The cross arms are 8 inches wide and 8 inches high. The distance from the center to the inner frame is 22 inches on the left and 40 inches on the right. The distance from the center to the outer frame is 3/4 inch (19 mm) on the left and 3/4 inch (19 mm) on the right. The distance from the center to the inner frame is 44 inches on the left and 18 inches on the right.



Call 800.375.4255 or email customercare@thegalley.com
for additional guidance on Tap and Tap Accessory placements

C.O. 62" (1575 mm)

I.D. 44" (1118 mm)

2 7/8" (73 mm) OUTSIDE

I.D. 18" (457 mm)

2 3/8" (60 mm)

10 3/4" (273 mm)

48" (1219 mm)
(CABINET LENGTH)


24" (610 mm)
(OPEN SPACE LENGTH)

72" (1829 mm)
(OVERALL LENGTH)

CABINETS ARE
TYPICALLY CUSTOM
MADE FOR GALLEY
DIMENSIONS. FOR
EXISTING CABINETS,
TRIM INTERIOR
BULKHEADS APPROX.
1" (25.4 mm) TO CLEAR
SINK DEPTH.

INSTALL SUPPORT CLEAT
1/16" (2 mm) LOWER THAN
TOP OF CABINET.

NOTE: PLEASE ALLOW A MINIMUM
OF 3" (76 mm) HEIGHT CLEARANCE
BELOW THE COUNTER TOP.


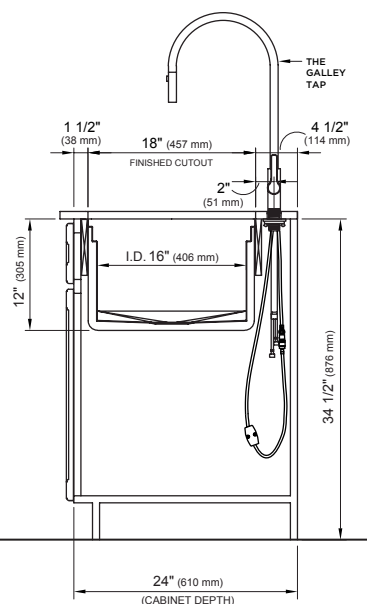


*Questions? For additional assistance, please contact
The Galley's Customer Care Department at 800.375.4255*

IWA² 4S + DryDock. 18

Left Hand Drain Orientation

Tap Hole Specifications

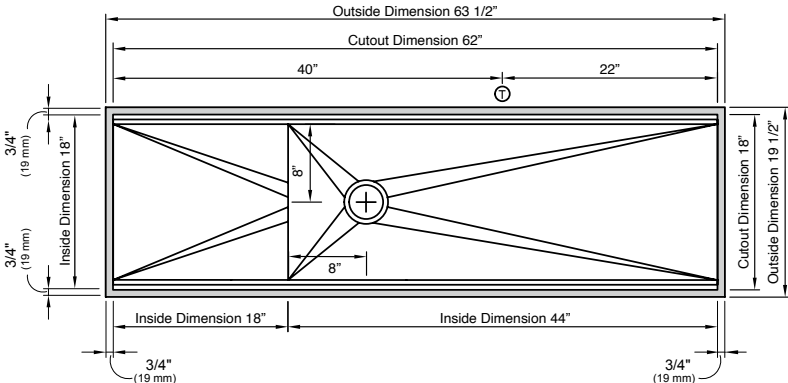

SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter

Center Tap hole diameters 2" behind cutout



Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customer care@thegalley.com
for additional guidance on Tap and Tap Accessory placements

Countertop Cutout Plan

Important Installation Note: DryDock requires 3" minimum clearance below countertop

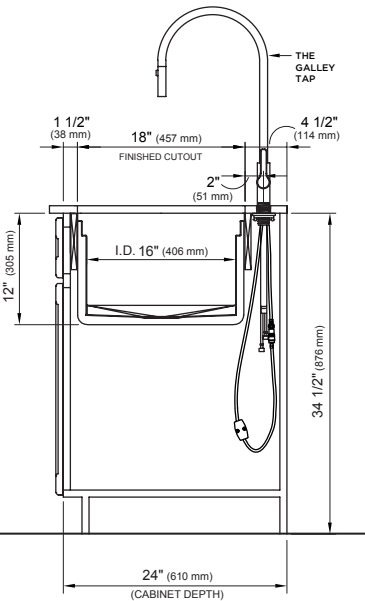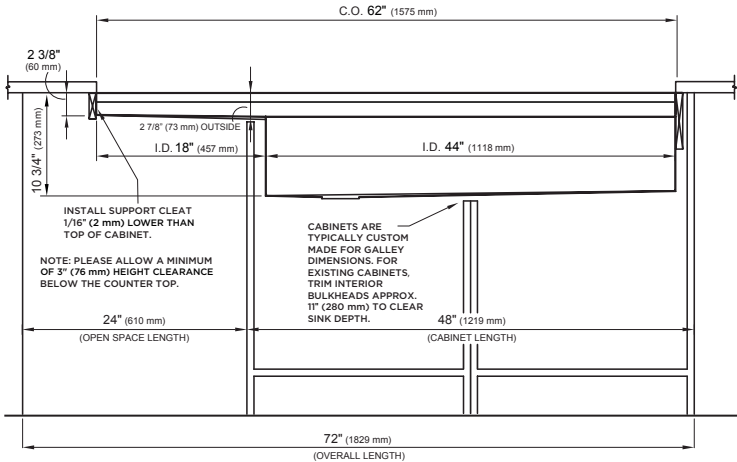

STAINLESS STEEL COMPLIANCE ASME A112.19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

TheGalley.com/specification-library

**Questions? For additional assistance, please contact
The Galley's Customer Care Department at 800.375.4255**