Ideal WashStation² 4S

IWA-4-S-2-QW



IWA-4-S-2-WA



American Black Walnut / Graphite Resin+

IWA-4-S-2-GT



Graphite Wood Composite / Graphite Resin+

IWA-4-S-2-GR



Exclusive Grav Resin* / Resin+

IWA-4-S-2-WH



Designer White Resin* / Resin+

Wash Tools included (WKT-4T)









(1) Upper Tier Drying Rack 9 1/4" x 18" DR-09-U-xx

(1) Lower Tier Wash Caddy 6" x 17" WC-06-L-xx

(1) Lower Tier Wash Bowl 12" x 17" WB-12-L-xx

(1) Upper Tier Utensil Caddy 6" x 18" UC-06-U-xx

Upper Deck. & citrine.

Cover set UD-4-2P-QW/WA/GT/GR/WH White Oak, Walnut, Graphite, Gray or White Resin





citrine care

CIT-09-SS-C





Stainless Steel Spray + Refresh 17 oz



CIT-04-WD-B Wood Finishing

Specifications

Single bowl Users: 1

Wash Tools included: Four

Galley Tap recommended: One Outside dimensions: 45 1/2" x 19 1/2" x 11 1/16"

Interior dimensions: 44" x 18" x 10 3/4"

Countertop cutout: 44" x 18" Basin area: 44" x 16"

Minimum cabinet size: 48" or 120cm

Basin (KSO-4-S-2-SS)

THE GALLEY.

16GA 316L stainless steel indoor/outdoor SilentArmor™ sound reduction technology Angel finish


Three tier design with integrated Upper Tier Star™ groove pattern

Reversible side drain Drain cover included

Limited Lifetime Warranty Made in the USA

ASME A112.19.3/CSA B45.4 certified

cUPC™ certified





Customize Your Galley

Recommended Basin Accessories & G4

Disposer Strainer G-DRN-MSS

Bottom Grate set BG-4-S-2-SS Stainless Steel



Strainer M-DRN-MSS





Auto Strainer A-DRN-PSS/MSS/BSS/YSS Angel Finish 304 Stainless or PVD Brushed Gold knob















Disposal G4-WD-125

Ideal WashStation² 4S



Tap Hole Specifications






SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements

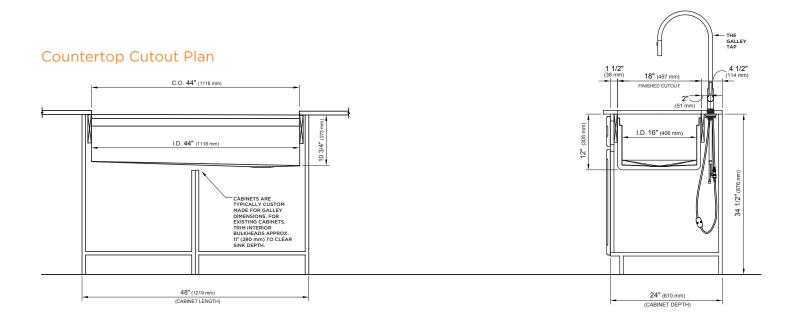

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.


DWG and DXF templates available on our website:


The Galley.com/specification-library

Ideal WashStation² 4S



Tap Hole Specifications






SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements

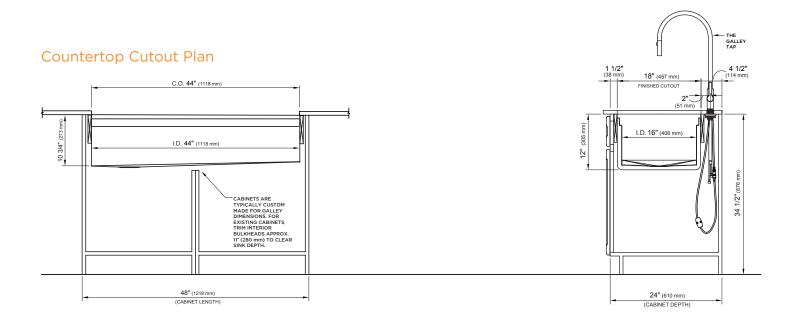

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

The Galley.com/specification-library

Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255