Ideal Work&WashStation™ 7D THEGALLEY.

IWW-7-D-QW



uartered White Oak / Exclusive Gray Resin+

IWW-7-D-WA



American Black Walnut / Graphite Resin+

IWW-7-D-GT



Graphite Wood Composite / Graphite Resin+

IWW-7-D-GR



IWW-7-D-WH



Designer White Resin* / Resin+

Culinary Tools included (CKT-17)



Section[†] 18" x 19"

UD-18-I-xx





CB-17-D-xx





P2-17-D-xx




C1-11-0-ST

(2) SS Mixing Bowls 11" 7.2-qt B1-11-0-ST

[†]The Upper Deck requires a 1/4" clearance below the surface of the countertop. If the countertop thickness is 3/4" or less, Walnut or White Oak Upper Deck sections will not have the clearance to function above the Upper Tier Culinary Tools.

Upper Deck. & citrine.

Cover set UD-7-4P-QW/WA/GT/GR/WH White Oak, Walnut, Graphite, Gray or White Resin





Included in CKT

citrine care

CIT-09-SS-C



CIT-17-SS-S Stainless Steel Spray + Refresh 17 oz



CIT-04-WD-B

Wood Finishing

Specifications

Double bowl Users: 1-3


Culinary/Wash Tools included: Twelve Galley Taps recommended: Two Outside dimensions: 81 1/2" x 19 1/2" x 10 5/16"


Interior dimensions: 80" x 17" x 10" Countertop cutout: 80 1/2" x 18" Basin area: 57 7/8", 21 7/8" x 16" Minimum cabinet size: 84" or 210cm

Basin (KSO-7-D-SS)

16GA 316L stainless steel indoor/outdoor SilentArmor™ sound reduction technology Angel finish Three tier design Star™ groove pattern

Reversible center/side drain Drain covers included Limited Lifetime Warranty Made in the USA ASME A112.19.3/CSA B45.4 certified cUPC™ certified





Customize Your Galley

Wash Tools included (WKT-4T)



Drying Rack 9 1/4" x 18"

DR-09-U-xx



Wash Caddy 6" x 17"

WC-06-L-xx







WB-12-L-xx




UC-06-U-xx

Utensil Caddy



Bottom Grate set BG-7-D-3-SS Stainless Steel



Strainer M-DRN-MSS

Disposer Strainer G-DRN-MSS





Auto Strainer A-DRN-PSS/MSS/BSS/YSS Angel Finish 304 Stainless St or PVD Brushed Gold knob















Disposal G4-WD-125

Ideal Work&WashStation™ 7D THEGALLEY.



Tap Hole Specifications

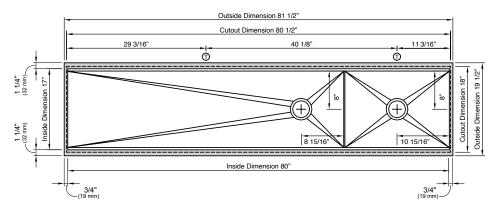




SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email **customercare@thegalley.com** for additional guidance on Tap and Tap Accessory placements

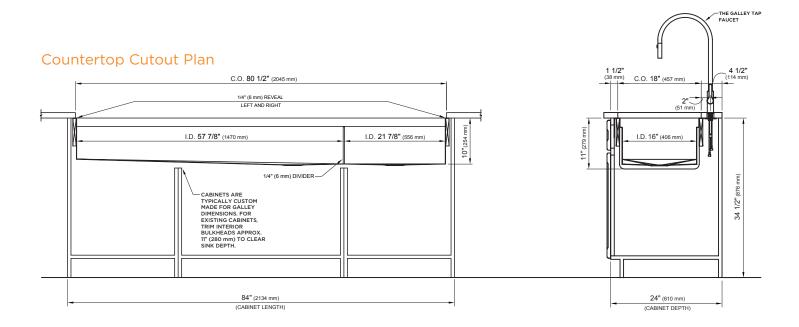

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:


TheGalley.com/specification-library


Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255

Ideal Work&WashStation™ 7D THEGALLEY.



Tap Hole Specifications

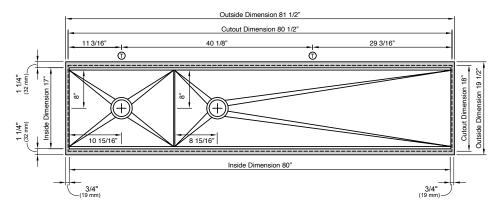




SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"
① Galley Tap 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements

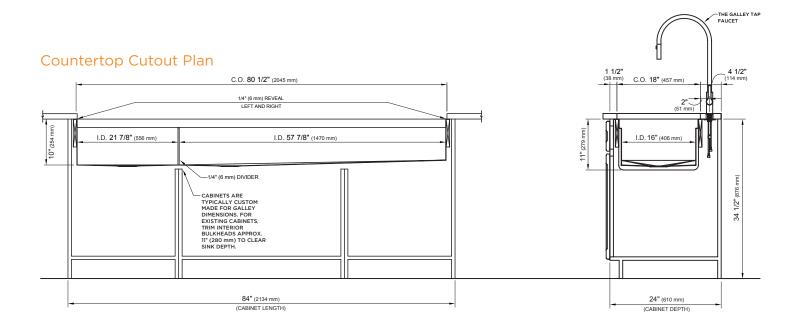

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

TheGalley.com/specification-library

Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255