Ideal Workstation. 30S

IWS-30-S-QW



IWS-30-S-WA



American Black Walnut

IWS-30-S-GT



IWS-30-S-GR



Exclusive Gray Resin*

IWS-30-S-WH



Culinary Tools included (CKT-12)



Section[†] 12" x 19"

UD-12-I-xx









CB-12-U-xx



P1-12-L-xx



C1-11-0-ST



Mixing Bowl 11" 7.2-qt B1-11-0-ST

[†]The Upper Deck requires a 1/4" clearance below the surface of the countertop. If the countertop thickness is 3/4" or less, Walnut or White Oak Upper Deck sections will not have the clearance to function above the Upper Tier Culinary Tools.

Upper Deck. & citrine.

Cover set UD-30-2P-QW/WA/GT/GR/WH White Oak, Walnut, Graphite, Gray or White Resin





Included in CKT

citrine care

CIT-09-SS-C





Stainless Steel Spray + Refresh 17 oz



CIT-04-WD-B

Wood Finishing Balm 4 oz

Specifications

Single bowl

Users: 1

Culinary Tools included: Five Galley BarTap_® recommended: One

Outside dimensions: 27 1/2" x 19 1/2" x 10 5/16"

Interior dimensions: 26" x 17" x 10" Countertop cutout: 26 1/2" x 18" Basin area: 26" x 16"

Minimum cabinet size: 30" or 76cm

Basin (KSO-30-S-SS)

THE GALLEY.

16GA 316L stainless steel indoor/outdoor SilentArmor™ sound reduction technology

Angel finish Three tier design

Star™ groove pattern Reversible side drain


Drain cover included

Limited Lifetime Warranty


Made in the USA

ASME A112.19.3/CSA B45.4 certified

cUPC™ certified



Center Galley Tap holes 2" from the back of the 18" countertop cutout



Customize Your Galley

Recommended Basin Accessories & G4

Bottom Grate set BG-30-S-1-SS Stainless Steel



Strainer M-DRN-MSS







Auto Strainer A-DRN-PSS/MSS/BSS/YSS Angel Finish 304 Stainless or PVD Brushed Gold knob














Disposal G4-WD-125

Ideal Workstation. 30S



Tap Hole Specifications





Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements

SUGGESTED GALLEY TAP PLACEMENT GUIDE Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley BarTap- 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap



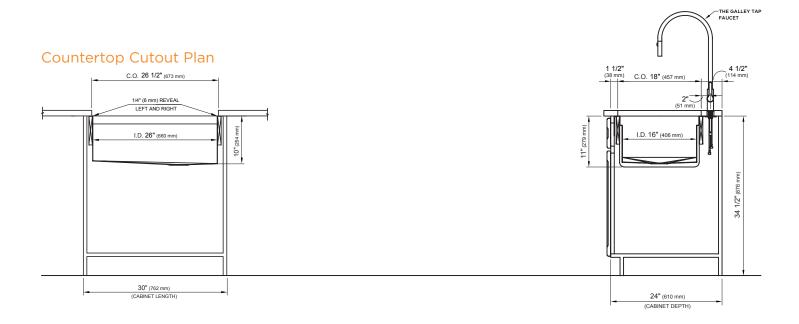

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:


The Galley.com/specification-library

Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255

Ideal Workstation. 30S



Tap Hole Specifications



C.O. 18" (457 mm) 1/2" (13 mm) REVEAL FRONT AND BACK 10"(254 I.D. 16" (406 mm)


SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements

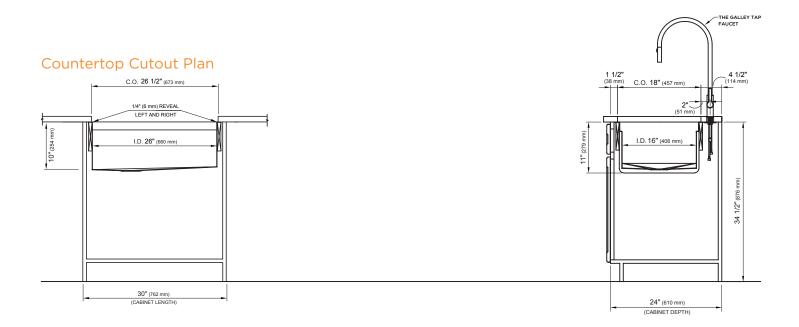

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

The Galley.com/specification-library

Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255