

IWS 3S + DryDock® 12

SPECIFICATIONS

THE GALLEY®

IWS-3-S-DD-12-S-QW



Quartered White Oak

IWS-3-S-DD-12-S-WA



American Black Walnut

IWS-3-S-DD-12-S-GT



Graphite Wood Composite

IWS-3-S-DD-12-S-GR




Exclusive Gray Resin*

IWS-3-S-DD-12-S-WH



Designer White Resin*

Culinary Tools included (CKT-12)

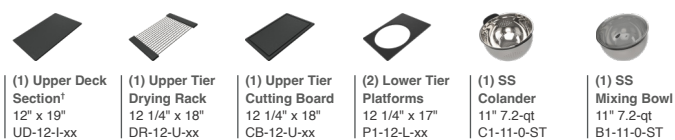

†The Upper Deck requires a 1/4" clearance below the surface of the countertop. If the countertop thickness is 3/4" or less, Walnut or White Oak Upper Deck sections will not have the clearance to function above the Upper Tier Culinary Tools.

Upper Deck® & citrine.

Cover set UD-3-12-3P-QW/WA/GT/GR/WH White Oak, Walnut, Graphite, Gray or White Resin



citrine care




Specifications

Single bowl
Users: 1
Culinary Tools included: Five
DryDock Tool included: One
Galley Tap recommended: One
Outside dimensions: 45 1/2" x 19 1/2" x 2 1/16"
Interior dimensions: 44" x 17" x 2"
Countertop cutout: 44 1/2" x 18"
Minimum cabinet size: 48" or 120cm
Minimum clearance required for DryDock below countertop: 2 1/4"
DryDock location: Drain side (S)

Basin (KSO-3-S-DS-12-S-SS)

16GA 316L stainless steel indoor/outdoor
SilentArmor™ sound reduction technology
Angel finish
Three tier design
Star™ groove pattern
Reversible side drain
Drain cover included
Limited Lifetime Warranty
Made in the USA
ASME A112.19.3/CSA B45.4 certified
cUPC™ certified

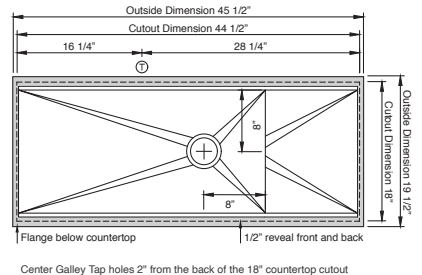

Important Installation Note: DryDock requires 2 1/4" minimum clearance below countertop

Customize Your Galley

Add 7-12" length
Add 1-6" length
Add 18" DryDock
Add 12" DryDock
Apron front


9" depth
Center drain
WorkTop™
*Color coded labels available

DryDock Tool included (DR-12)



Recommended Basin Accessories & G4

Bottom Grate set BG-3-S-1-SS Stainless Steel



Strainer M-DRN-MSS
Angel Finish 304 Stainless Steel



Disposer Strainer G-DRN-MSS
Angel Finish 304 Stainless Steel



Auto Strainer A-DRN-PSS/MSS/BSS/YSS
Angel Finish 304 Stainless Steel with Polished, Matte, PVD Satin Black, or PVD Brushed Gold knob



Disposal G4-WD-125




IWS 3S + DryDock[®] 12

SPECIFICATIONS | Right Hand Drain Orientation



Tap Hole Specifications

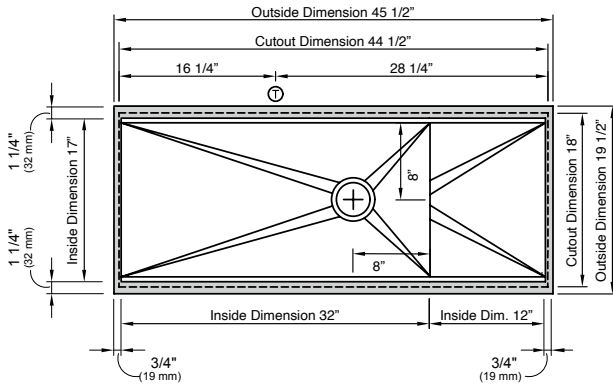

SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"


① Galley Tap 1 3/8" min to 1 1/2" max hole diameter

Center Tap hole diameters 2" behind cutout

Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap



Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements

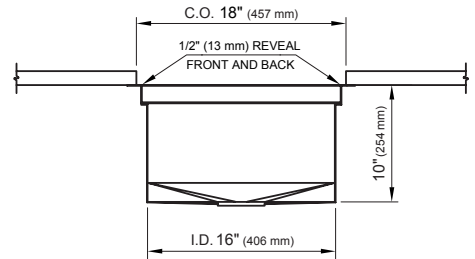

Countertop Cutout Plan

Important Installation Note: DryDock requires 2 1/4" minimum clearance below countertop

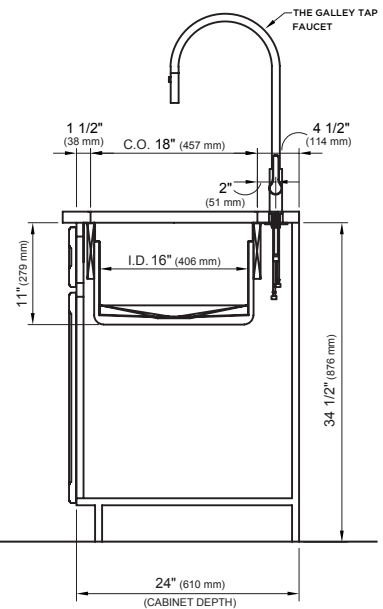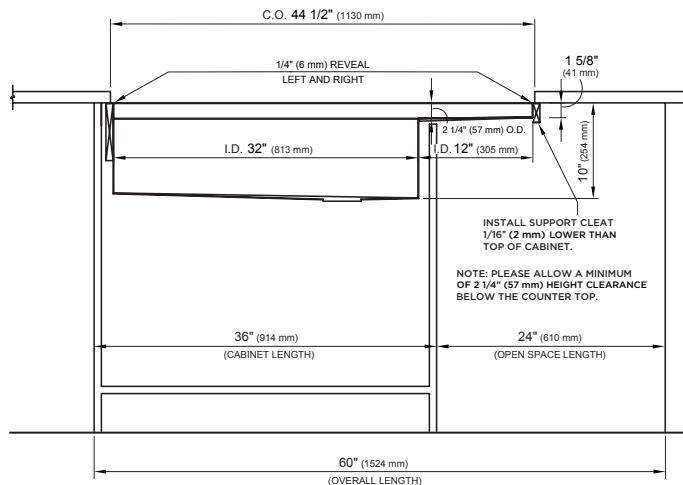

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:


TheGalley.com/specification-library

Questions? For additional assistance, please contact
The Galley's Customer Care Department at 800.375.4255

THE GALLEY®

Technical drawing of a rectangular plaque with a central crosshair. The drawing includes the following dimensions:

- Outside Dimension:** 45 1/2" (top)
- Cutout Dimension:** 44 1/2" (top)
- Horizontal Spacing:** 28 1/4" (left of center) and 16 1/4" (right of center)
- Vertical Spacing:** 17" (left of center) and 18" (right of center)
- Inside Dimensions:** 12" (left) and 32" (right)
- Corner Dimensions:** 3/4" (19 mm) (bottom left and right corners)
- Central Feature:** A crosshair with a central circle and a vertical line through it.
- Other Labels:** "1 1/4" (32 mm)" on the left side, "Cutout Dimension 19 1/2" on the right side, and a circled "T" in the center.

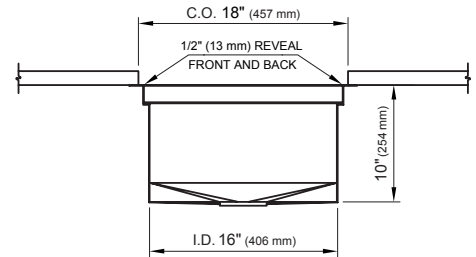


Note: Tap 1 placements are for right hand or left hand drain orientation

Technical drawing of a cabinet with dimensions in inches and millimeters.

Dimensions and Labels:

- C.O. 44 1/2" (1130 mm)**: Overall width of the cabinet.
- 1 5/8" (41 mm)**: Width of the top panel.
- 10" (254 mm)**: Height of the top panel.
- 1/4" (6 mm) REVEAL LEFT AND RIGHT**: Clearance on the left and right sides of the top panel.
- 2 1/4" (57 mm) O.D.**: Outer diameter of the support cleat.
- I.D. 12" (305 mm)**: Inner diameter of the support cleat.
- I.D. 32" (813 mm)**: Inner diameter of the cabinet body.
- INSTALL SUPPORT CLEAT 1/16" (2 mm) LOWER THAN TOP OF CABINET.**: Instruction for the support cleat installation.
- NOTE: PLEASE ALLOW A MINIMUM OF 2 1/4" (57 mm) HEIGHT CLEARANCE BELOW THE COUNTER TOP.**: Instruction for the clearance below the counter top.
- 24" (610 mm) (OPEN SPACE LENGTH)**: Length of the open space below the counter top.
- 36" (914 mm) (CABINET LENGTH)**: Length of the cabinet body.
- 60" (1524 mm) (OVERALL LENGTH)**: Overall length of the cabinet.

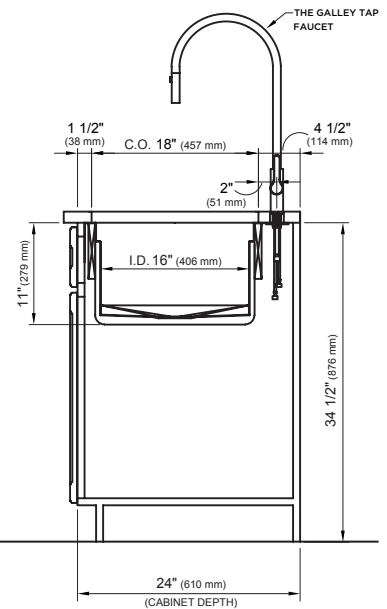

*Questions? For additional assistance, please contact
The Galley's Customer Care Department at 800.375.4255*