Ideal Workstation. 3S

IWS-3-S-QW



IWS-3-S-WA



American Black Walnut

IWS-3-S-GT



IWS-3-S-GR



Exclusive Gray Resin

IWS-3-S-WH



Designer White Resin

Culinary Tools included (CKT-12)













P1-12-L-xx





(1) SS Mixing Bowl 11" 7.2-qt B1-11-0-ST

[†]The Upper Deck requires a 1/4" clearance below the surface of the countertop. If the countertop thickness is 3/4" or less, Walnut or White Oak Upper Deck sections will not have the clearance to function above the Upper Tier Culinary Tools.

Upper Deck. & citrine.

Cover set UD-3-2P-QW/WA/GT/GR/WH White Oak, Walnut, Graphite, Gray or White Resin







Included in CKT

citrine care

CIT-09-SS-C







Wood Condition + Protect 9 oz



Specifications

Single bowl

Users: 1

Culinary Tools included: Five

Galley Tap recommended: One

Outside dimensions: 33 1/2" x 19 1/2" x 10 5/16" Interior dimensions: 32" x 17" x 10"

Countertop cutout: 32 1/2" x 18" Basin area: 32" x 16"

Minimum cabinet size: 36" or 90cm

Basin (KSO-3-S-SS)

THE GALLEY.

16GA 316L stainless steel indoor/outdoor SilentArmor™ sound reduction technology

Angel finish Three tier design

Star™ groove pattern


Reversible side drain Drain cover included

Limited Lifetime Warranty


Made in the USA

ASME A112.19.3/CSA B45.4 certified

cUPC™ certified



Center Galley Tap holes 2" from the back of the 18" countertop cutoul



Customize Your Galley

Disposal G4-WD-125

Recommended Basin Accessories & G4

Bottom Grate set BG-3-S-1-SS Stainless Steel



Strainer M-DRN-MSS

Disposer Strainer G-DRN-MSS





Auto Strainer A-DRN-PSS/MSS/BSS/YSS Angel Finish 304 Stainless Steel with Polished, Matte, PVD Satin Black, or PVD Brushed Gold knob
















Ideal Workstation. 3S



Tap Hole Specifications

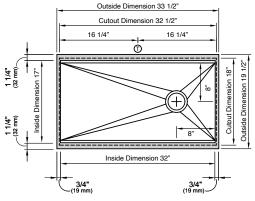


SUGGESTED GALLEY TAP PLACEMENT GUIDE


Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements



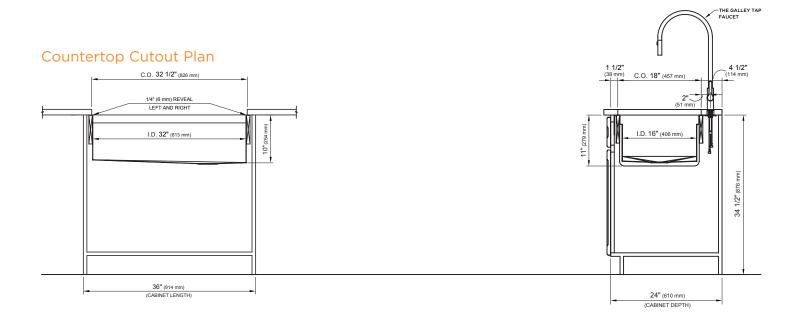

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.


DWG and DXF templates available on our website:

The Galley.com/specification-library

Ideal Workstation. 3S



Tap Hole Specifications

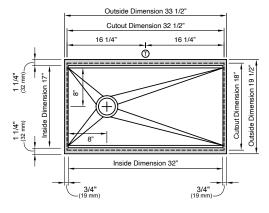


SUGGESTED GALLEY TAP PLACEMENT GUIDE


Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements



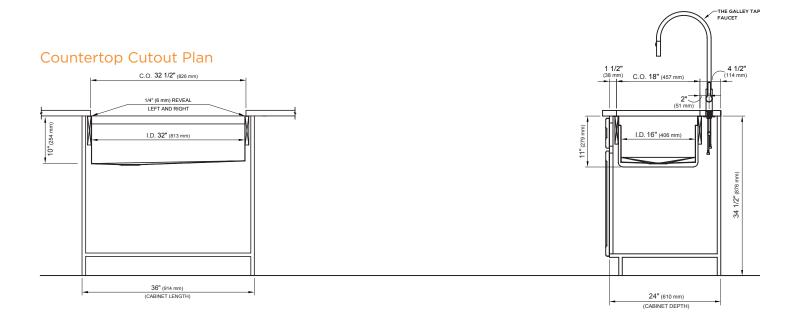

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

The Galley.com/specification-library

Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255