IWS² 3S + DryDock, 12

IWS-3-S-DD-12-S-2-QW



IWS-3-S-DD-12-S-2-WA



American Black Walnut

IWS-3-S-DD-12-S-2-GT



IWS-3-S-DD-12-S-2-GR



Exclusive Gray Resin

IWS-3-S-DD-12-S-2-WH



Designer White Resin*

Culinary Tools included (CKT-12)







(1) Upper Tier Drying Rack 12 1/4" x 18" DR-12-U-xx



CB-12-U-xx





C1-11-0-ST



(1) SS Mixing Bowl 11" 7.2-qt

B1-11-0-ST

Specifications

Single bowl

Users: 1

Culinary Tools included: Five

DryDock Tool included: One

Galley Tap recommended: One

Outside dimensions: 45 1/2" x 19 1/2" x 2 7/8" Interior dimensions: 44" x 18" x 2 3/4"

Countertop cutout: 44" x 18"

Minimum cabinet size: 48" or 120cm

Minimum clearance required for DryDock

below countertop: 3"

DryDock location: Drain side (S)

Basin (KSO-3-S-DS-12-S-2-SS)

16GA 316L stainless steel indoor/outdoor SilentArmor™ sound reduction technology Angel finish

Three tier design with integrated Upper Tier Star™ groove pattern

Reversible side drain


Drain cover included Limited Lifetime Warranty

THE GALLEY.


Made in the USA

ASME A112.19.3/CSA B45.4 certified

cUPC™ certified



Center Galley Tap holes 2" from the back of the 18" countertop cutout



Important Installation Note: DryDock requires 3" minimum clearance below countertop

Customize Your Galley

DryDock Tool included (DR-12)



(1) Lower Tier Drying Rack 12 1/4" x 17" DR-12-L-xx

Upper Deck. & citrine.

Cover set UD-3-12-3P-QW/WA/GT/GR/WH White Oak, Walnut, Graphite, Gray or White Resin







CIT-09-SS-C





Stainless Steel Spray + Refresh 17 oz







Bottom Grate set BG-3-S-1-SS Stainless Steel



Strainer M-DRN-MSS





Recommended Basin Accessories & G4



Auto Strainer A-DRN-PSS/MSS/BSS/YSS Angel Finish 304 Stainless Ste or PVD Brushed Gold knob















Disposal G4-WD-125

IWS² 3S + DryDock, 12 SPECIFICATIONS | Right Hand Drain Orientation



Tap Hole Specifications






SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements

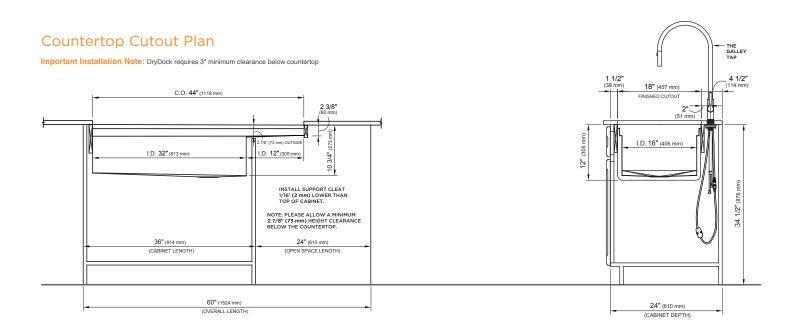

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:


The Galley.com/specification-library


Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255

IWS² 3S + DryDock, 12



Tap Hole Specifications






SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements

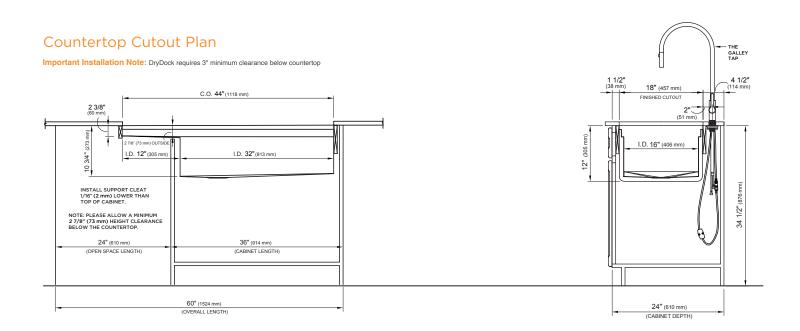

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

The Galley.com/specification-library

Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255