

IWS² 4S + DryDock. 12

SPECIFICATIONS

THE GALLEY®

IWS-4-S-DD-12-S-2-QW



Quartered White Oak

IWS-4-S-DD-12-S-2-WA



American Black Walnut

IWS-4-S-DD-12-S-2-GT



Graphite Wood Composite

IWS-4-S-DD-12-S-2-GR




Exclusive Gray Resin*

IWS-4-S-DD-12-S-2-WH



Designer White Resin*

Culinary Tools included (CKT-12)



(1) Upper Deck
Section
12" x 19"
UD-12-L-xx

(1) Upper Tier
Drying Rack
12 1/4" x 18"
DR-12-U-xx

(1) Upper Tier
Cutting Board
12 1/4" x 18"
CB-12-U-xx

(2) Lower Tier
Platforms
12 1/4" x 17"
P1-12-L-xx

(1) SS
Colander
11" 7.2-qt
C1-11-O-ST


(1) SS
Mixing Bowl
11" 7.2-qt
B1-11-O-ST

Specifications


Single bowl
Users: 1
Culinary Tools included: Five
DryDock Tool included: One
Galley Tap recommended: One
Outside dimensions: 57 1/2" x 19 1/2" x 2 7/8"
Interior dimensions: 56" x 18" x 2 3/4"
Countertop cutout: 56" x 18"
Minimum cabinet size: 60" or 150cm
Minimum clearance required for DryDock below countertop: 3"
DryDock location: Drain side (S)

Basin (KSO-4-S-DS-12-S-2-SS)

16GA 316L stainless steel indoor/outdoor
SilentArmor™ sound reduction technology
Angel finish
Three tier design with integrated Upper Tier
Star™ groove pattern
Reversible side drain
Drain cover included
Limited Lifetime Warranty
Made in the USA
ASME A112.19.3/CSA B45.4 certified
cUPC™ certified

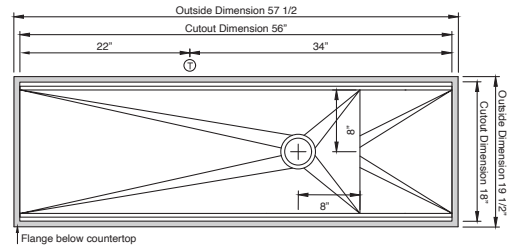

Center Galley Tap holes 2" from the back of the 18" countertop cutout

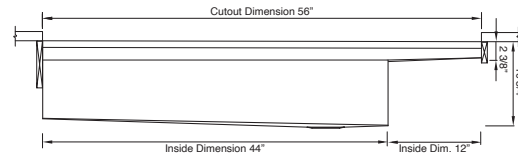

Important Installation Note: DryDock requires 3" minimum clearance below countertop

Customize Your Galley

Add 7-12" length
Add 1-6" length
Add 18" DryDock
Add 12" DryDock
Apron front

9" depth
Center drain
WorkTop™
*Color coded labels available

DryDock Tool included (DR-12)



(1) Lower Tier
Drying Rack
12 1/4" x 17"
DR-12-L-xx

Upper Deck & citrine.

Cover set UD-4-12-3P-QW/WA/GT/GR/WH White Oak, Walnut, Graphite, Gray or White Resin




(1) 12"
Included in CKT

citrine care


CIT-09-SS-C




CIT-17-SS-S



CIT-09-WD-C




CIT-04-WD-B



Recommended Basin Accessories & G4

Bottom Grate set BG-4-S-2-SS Stainless Steel



Strainer M-DRN-MSS
Angel Finish 304 Stainless Steel



Disposer Strainer G-DRN-MSS
Angel Finish 304 Stainless Steel



Auto Strainer A-DRN-PSS/MSS/BSS/YSS
Angel Finish 304 Stainless Steel with Polished, Matte, PVD Satin Black, or PVD Brushed Gold knob



A-DRN-MSS shown

Disposal G4-WD-12S




IWS² 4S + DryDock. 12

SPECIFICATIONS | Right Hand Drain Orientation

THE GALLEY®

Tap Hole Specifications

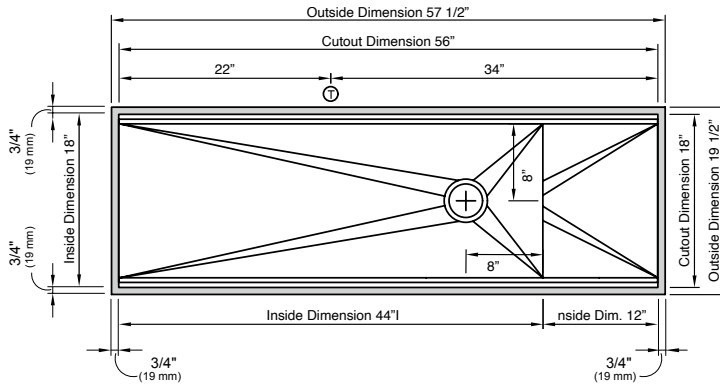

SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"


① Galley Tap 1 3/8" min to 1 1/2" max hole diameter

Center Tap hole diameters 2" behind cutout

Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap



Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com
for additional guidance on Tap and Tap Accessory placements



Countertop Cutout Plan

Important Installation Note: DryDock requires 3" minimum clearance below countertop

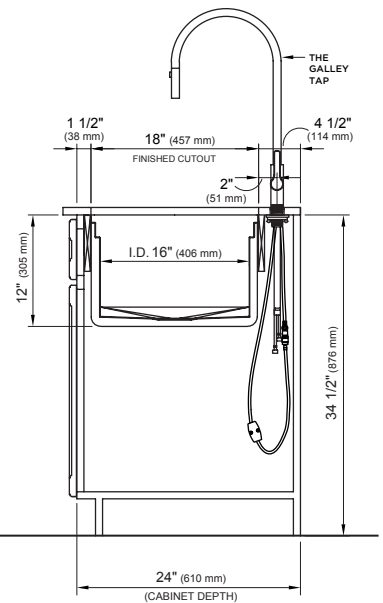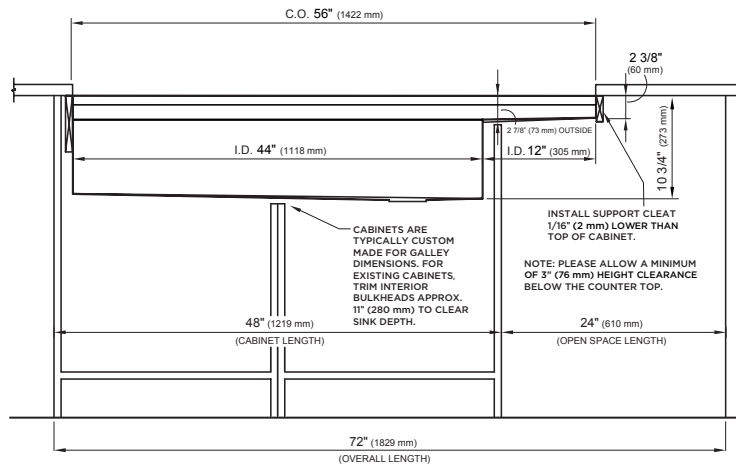

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:


TheGalley.com/specification-library

Questions? For additional assistance, please contact
The Galley's Customer Care Department at 800.375.4255

THE GALLEY®

Technical drawing of a rectangular cutout with a central circular hole. The drawing shows overall dimensions, cutout dimensions, and internal structural details. Key dimensions include:

- Outside Dimension 57 1/2"
- Cutout Dimension 56"
- Inside Dimension 44"
- Inside Dim. 12"
- Central Hole Diameter: 8"
- Cutout Width: 34"
- Cutout Height: 22"
- Overall Height: 18"
- Internal Structural Details: 3/4" (19 mm) and 3/4" (19 mm) dimensions are shown for the internal structure.



Note: Tap Placements are for right hand or left hand drain orientation


Technical drawing of a kitchen island showing dimensions and installation notes.

Dimensions:

- Overall Length: 72" (1829 mm)
- Open Space Length: 24" (610 mm)
- Cabinet Length: 48" (1219 mm)
- Top Thickness: 2 3/8" (60 mm)
- Height from Floor to Top: 10 3/4" (273 mm)
- Outside Diameter (I.D.): 3 7/8" (73 mm)
- Inside Diameter (I.D.): 12" (305 mm)
- Inside Diameter (I.D.): 44" (1118 mm)
- Height from Floor to Cabinet Top: 48" (1219 mm)

Installation Notes:

- INSTALL SUPPORT CLEAT 1/16" (2 mm) LOWER THAN TOP OF CABINET.
- NOTE: PLEASE ALLOW A MINIMUM OF 3" (76 mm) HEIGHT CLEARANCE BELOW THE COUNTER TOP.
- CABINETS ARE TYPICALLY CUSTOM MADE FOR GALLEY DIMENSIONS. FOR EXISTING CABINETS, TRIM INTERIOR BULKHEADS APPROX. 1" (280 mm) TO CLEAR SINK DEPTH.

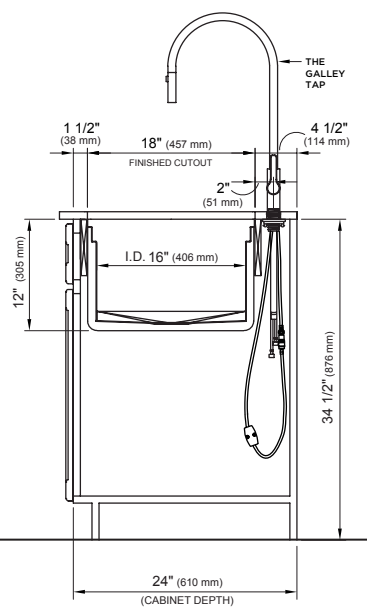

*Questions? For additional assistance, please contact
The Galley's Customer Care Department at 800.375.4255*