

IWS² 4S + DryDock. 18

SPECIFICATIONS

THE GALLEY®

IWS-4-S-DD-18-S-2-QW



Quartered White Oak

IWS-4-S-DD-18-S-2-WA



American Black Walnut

IWS-4-S-DD-18-S-2-GT



Graphite Wood Composite

IWS-4-S-DD-18-S-2-GR




Exclusive Gray Resin*

IWS-4-S-DD-18-S-2-WH



Designer White Resin*

Culinary Tools included (CKT-12)

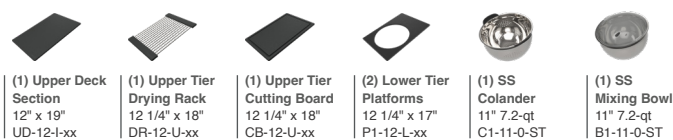

(1) Upper Deck
Section
12" x 19"
UD-12-I-xx

(1) Upper Tier
Drying Rack
12 1/4" x 18"
DR-12-U-xx

(1) Upper Tier
Cutting Board
12 1/4" x 18"
CB-12-U-xx

(2) Lower Tier
Platforms
12 1/4" x 17"
P1-12-L-xx

(1) SS
Colander
11" 7.2-qt
C1-11-O-ST


(1) SS
Mixing Bowl
11" 7.2-qt
B1-11-O-ST

Specifications

Single bowl
Users: 1
Culinary Tools included: Five
DryDock Tool included: One
Galley Tap recommended: One
Outside dimensions: 63 1/2" x 19 1/2" x 2 7/8"
Interior dimensions: 62" x 18" x 2 3/4"
Countertop cutout: 62" x 18"
Minimum cabinet size: 66" or 165cm
Minimum clearance required for DryDock below countertop: 3"
DryDock location: Drain side (S)

Basin (KSO-4-S-DS-18-S-2-SS)

16GA 316L stainless steel indoor/outdoor
SilentArmor™ sound reduction technology
Angel finish
Three tier design with integrated Upper Tier
Star™ groove pattern
Reversible side drain
Drain cover included
Limited Lifetime Warranty
Made in the USA
ASME A112.19.3/CSA B45.4 certified
cUPC™ certified

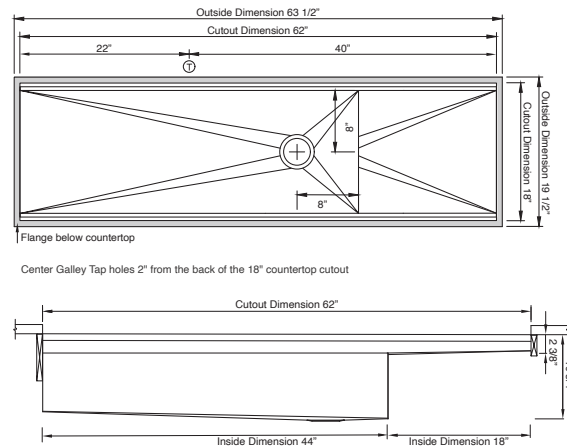

Important Installation Note: DryDock requires 3" minimum clearance below countertop

Customize Your Galley

Add 7-12" length
Add 1-6" length
Add 18" DryDock
Add 12" DryDock
Apron front
9" depth
Center drain
WorkTop™
*Color coded labels available


DryDock Tool included (DR-18)



(1) Dual Tier
Drying Rack
18" x 17"
DR-18-D-xx

Upper Deck & citrine.


Cover set UD-4-18-3P-QW/WA/GT/GR/WH White Oak, Walnut, Graphite, Gray or White Resin




24"
24"
18"
(1) 12"
Included in CKT

citrine care


CIT-09-SS-C




CIT-17-SS-S



CIT-09-WD-C




CIT-04-WD-B



Recommended Basin Accessories & G4

Bottom Grate set BG-4-S-2-SS Stainless Steel



Strainer M-DRN-MSS
Angel Finish 304 Stainless Steel



Disposer Strainer G-DRN-MSS
Angel Finish 304 Stainless Steel



Auto Strainer A-DRN-PSS/MSS/BSS/YSS
Angel Finish 304 Stainless Steel with Polished, Matte, PVD Satin Black, or PVD Brushed Gold knob



A-DRN-MSS shown

Disposal G4-WD-125





IWS² 4S + DryDock® 18

SPECIFICATIONS | Right Hand Drain Orientation

THE GALLEY.

Tap Hole Specifications

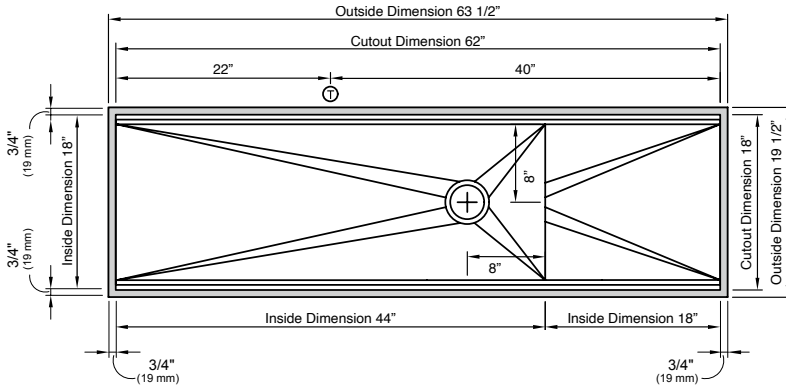

SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter

Center Tap hole diameters 2" behind cutout



Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com
for additional guidance on Tap and Tap Accessory placements

Countertop Cutout Plan

Important Installation Note: DryDock requires 3" minimum clearance below countertop

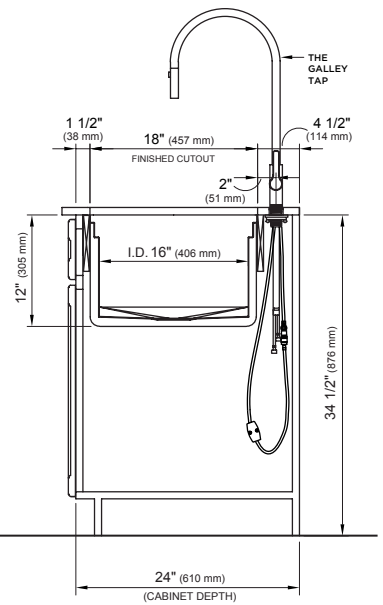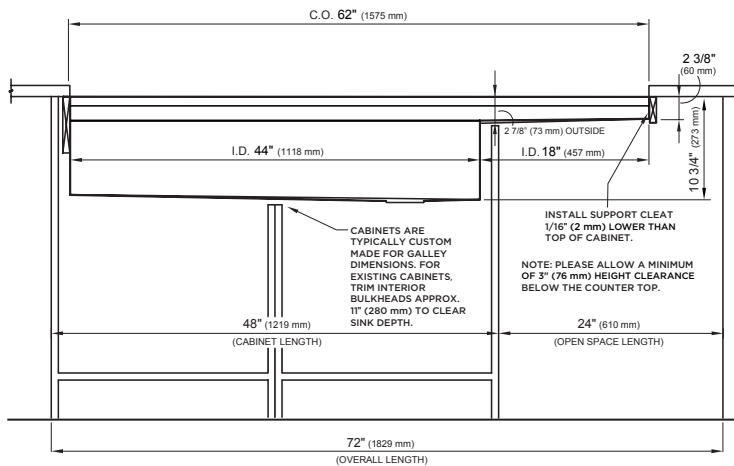

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:


TheGalley.com/specification-library

*Questions? For additional assistance, please contact
The Galley's Customer Care Department at 800.375.4255*

THE GALLEY®

Technical drawing of a rectangular sign with a central crosshair. The drawing includes the following dimensions and labels:

- Outside Dimension 63 1/2"** (top horizontal dimension)
- Cutout Dimension 62"** (top horizontal dimension, slightly inside the outer border)
- 40"** (top horizontal dimension, from the left edge to the center of the crosshair)
- 22"** (top horizontal dimension, from the center of the crosshair to the right edge)
- 3/4" (19 mm)** (top left corner dimension, from the outer edge to the inner border)
- Inside Dimension 18"** (top left vertical dimension, from the top edge to the horizontal line of the crosshair)
- 8"** (top right vertical dimension, from the horizontal line of the crosshair to the top edge of the cutout)
- 8"** (bottom right horizontal dimension, from the vertical line of the crosshair to the right edge of the cutout)
- Inside Dimension 44"** (bottom horizontal dimension, from the left edge of the cutout to the right edge of the cutout)
- Inside Dimension 18"** (bottom horizontal dimension, from the left edge to the left edge of the cutout)
- 3/4" (19 mm)** (bottom left corner dimension, from the outer edge to the inner border)
- Cutout Dimension 18"** (bottom right vertical dimension, from the bottom edge to the horizontal line of the crosshair)
- Outside Dimension 19 1/2"** (bottom right vertical dimension, from the bottom edge to the top edge of the cutout)
- 3/4" (19 mm)** (bottom right corner dimension, from the outer edge to the inner border)




Note: Tap Placements are for right hand or left hand drain orientation

Technical diagram of a 72" (1829 mm) wide cabinet with a 44" (1118 mm) interior depth. The diagram shows the overall dimensions and internal structure.

Key dimensions and labels:

- Overall Length:** 72" (1829 mm)
- Overall Depth:** 24" (610 mm)
- Interior Depth:** 44" (1118 mm)
- Cabinet Length:** 48" (1219 mm)
- Top Panel Thickness:** 2 3/8" (60 mm)
- Support Cleat Height:** 10 3/4" (273 mm)
- Support Cleat Width:** 2 7/8" (73 mm) OUTSIDE, I.D. 1 3/4" (35 mm)
- Support Cleat Label:** INSTALL SUPPORT CLEAT 1/16" (2 mm) LOWER THAN TOP OF CABINET.
- Note:** NOTE: PLEASE ALLOW A MINIMUM OF 3" (76 mm) HEIGHT CLEARANCE BELOW THE COUNTER TOP.
- Cabinet Label:** CABINETS ARE TYPICALLY CUSTOM MADE FOR GALLEY DIMENSIONS. FOR EXISTING CABINETS, TRIM INTERIOR BULKHEADS APPROX. 1" (25 mm) TO CLEAR SINK DEPTH.

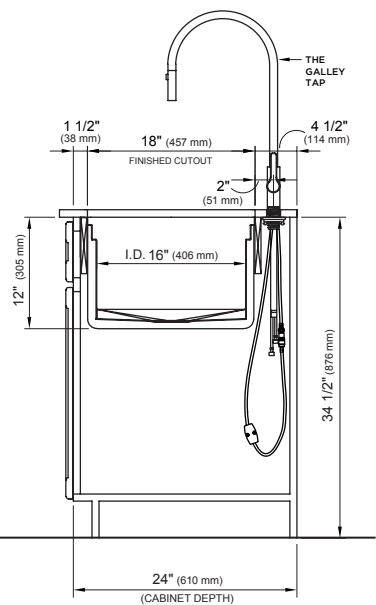

*Questions? For additional assistance, please contact
The Galley's Customer Care Department at 800.375.4255*