Ideal Workstation² 5S

IWS-5-S-2-QW



IWS-5-S-2-WA



American Black Walnut

IWS-5-S-2-GT



IWS-5-S-2-GR



Exclusive Gray Resin*

IWS-5-S-2-WH



Designer White Resin*

Culinary Tools included (CKT-17)







DR-17-D-xx





CB-17-D-xx



P2-17-D-xx







Mixing Bowls 11" 7.2-qt B1-11-0-ST

Specifications

Single bowl Users: 1-2 Culinary Tools included: Eight Galley Taps recommended: Two Outside dimensions: 57 1/2" x 19 1/2" x 11 1/16" Interior dimensions: 56" x 18" x 10 3/4" Countertop cutout: 56" x 18"

Basin area: 56" x 16"

Minimum cabinet size: 60" or 150cm

Basin (KSO-5-S-2-SS)

THE GALLEY.

16GA 316L stainless steel indoor/outdoor SilentArmor™ sound reduction technology Angel finish


Three tier design with integrated Upper Tier Star™ groove pattern

Reversible side drain Drain cover included


Limited Lifetime Warranty Made in the USA

ASME A112.19.3/CSA B45.4 certified

cUPC™ certified




Center Galley Tap holes 2" from the back of the 18" countertop cutout



Upper Deck, & citrine,

Cover set UD-5-3P-QW/WA/GT/GR/WH White Oak, Walnut, Graphite, Gray or White Resin





Included in CKT

citrine care CIT-09-SS-C



Stainless Steel

CIT-17-SS-S


Stainless Steel Spray + Refresh 17 oz

CIT-09-WD-C Wood Condition + Protect 9 oz

CIT-04-WD-B Wood Finishing Balm 4 oz

Recommended Basin Accessories & G4

Bottom Grate set BG-5-S-2-SS Stainless Steel



Strainer M-DRN-MSS



Disposer Strainer G-DRN-MSS Angel Finish 304 Stainless Stee



Auto Strainer A-DRN-PSS/MSS/BSS/YSS Angel Finish 304 Stainless Ste or PVD Brushed Gold knob



















Disposal G4-WD-125

Ideal Workstation² 5S



Tap Hole Specifications

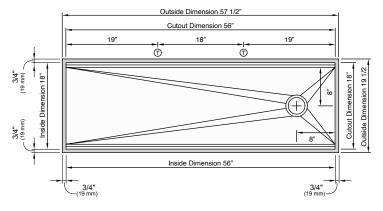




SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements

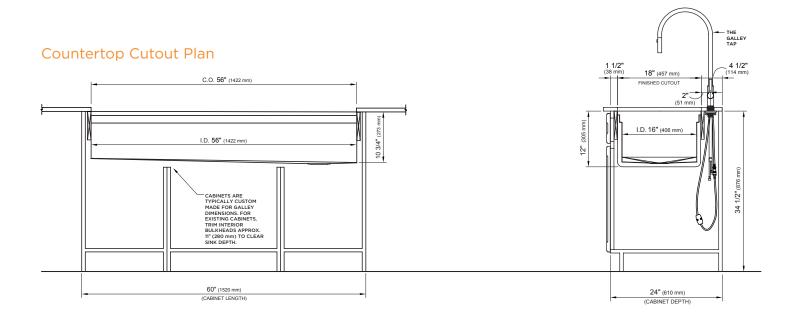

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:


The Galley.com/specification-library


Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255

Ideal Workstation² 5S



Tap Hole Specifications

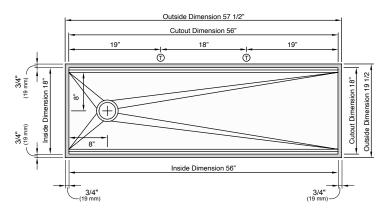




SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter
Center Tap hole diameters 2" behind cutout
Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email customercare@thegalley.com for additional guidance on Tap and Tap Accessory placements

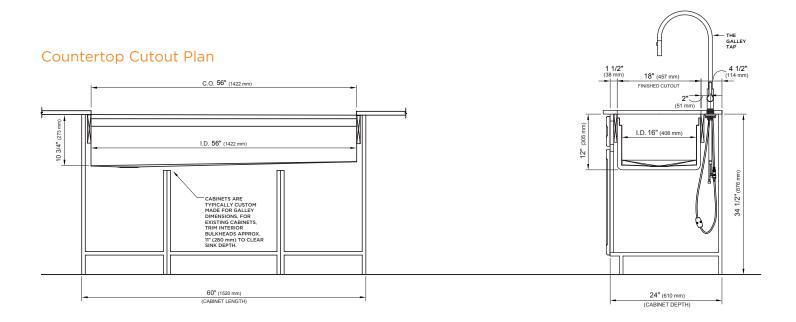

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:

The Galley.com/specification-library

Questions? For additional assistance, please contact The Galley's Customer Care Department at 800.375.4255